




ROOM SURVEY DRAWINGS

OFFICE 354 × 315 × 280 | CAVE 460 × 915 × 290 | LAB 554 × 269 × 290 | ENGINEERING 500 × 1100 × 305 | ROBOTICS 384 × 1340 × 305 | CM

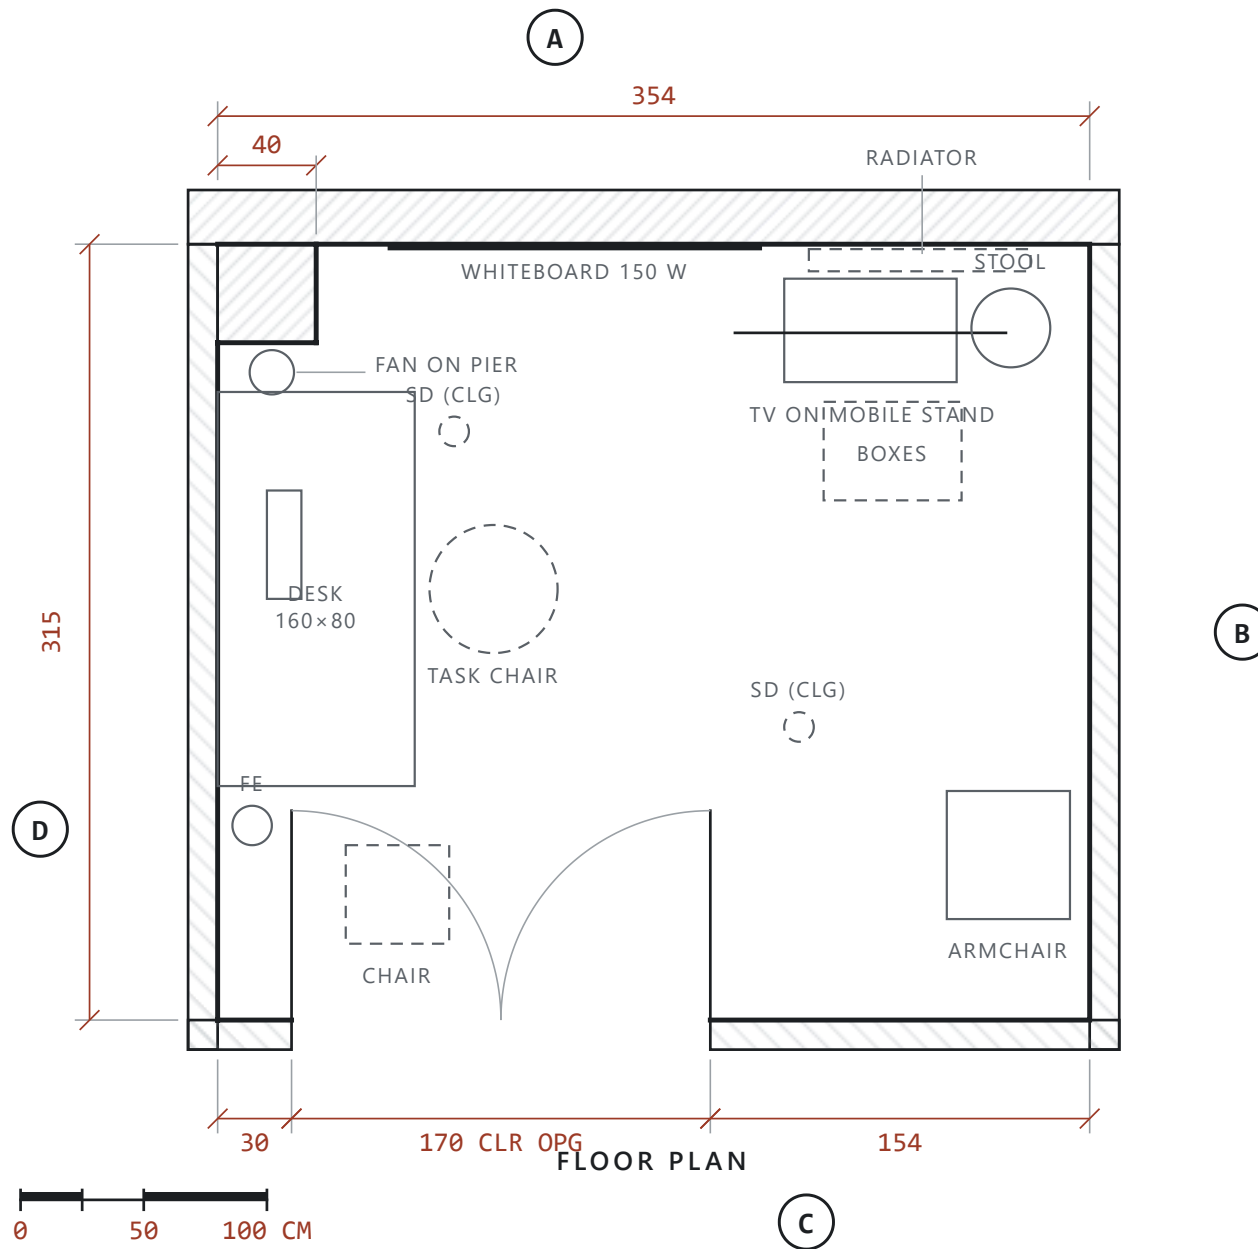


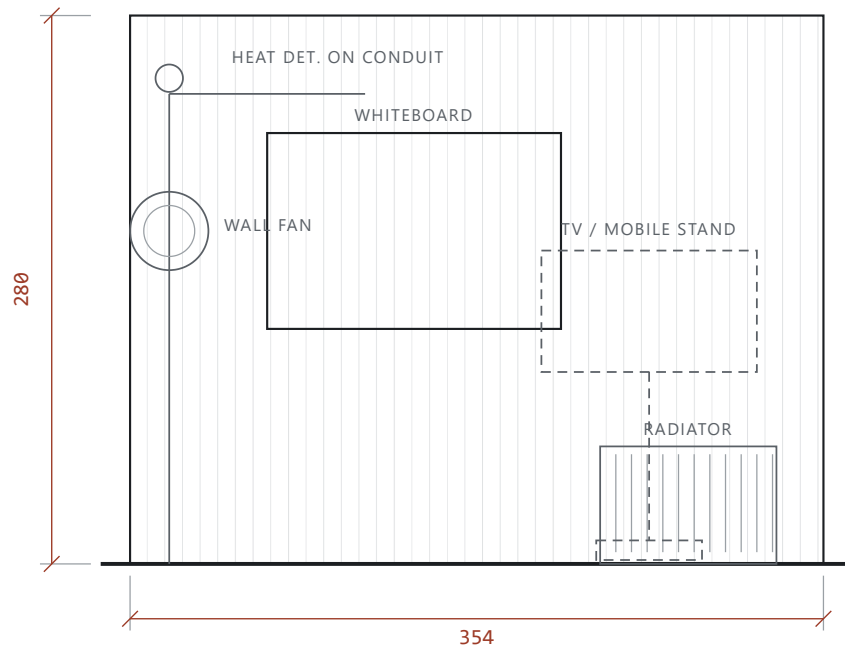


ELEVATION A
EXPOSED BRICK WALL

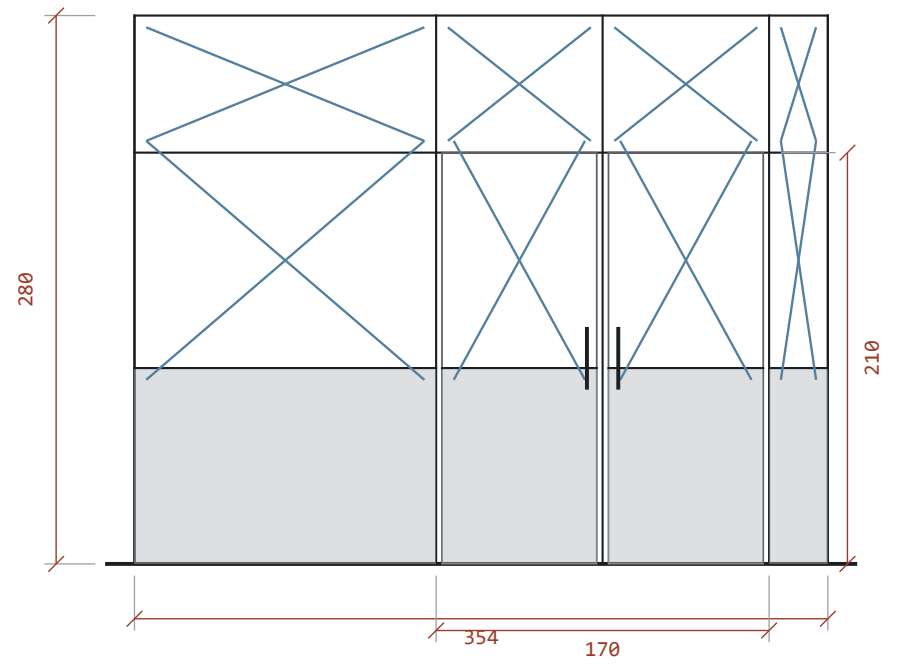

ELEVATION C
GLAZED STEEL PARTITION + DOUBLE DOORS

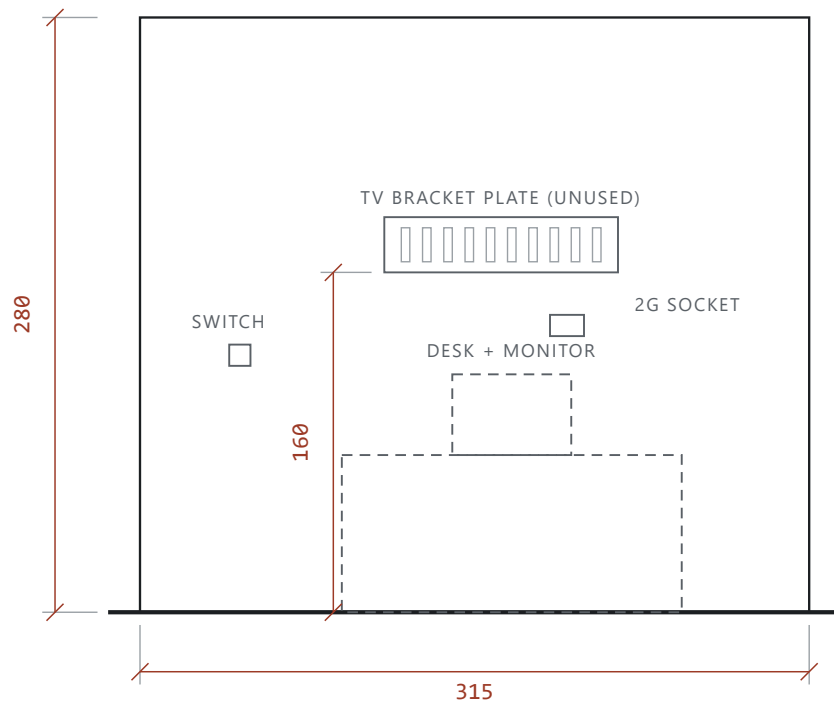


ELEVATION D
PAINTED PARTITION WALL

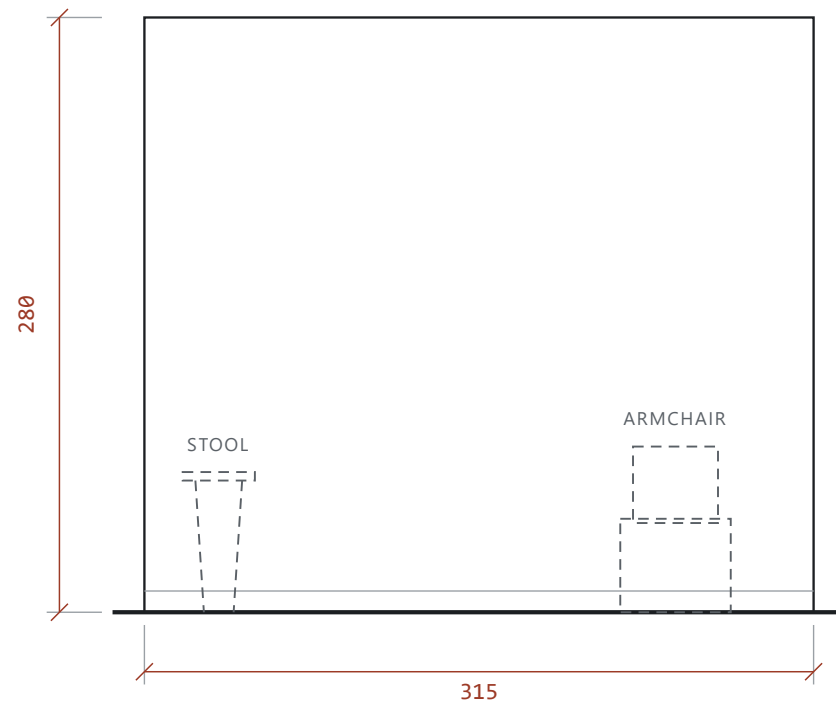


ELEVATION B
PAINTED WALL


SURVEY NOTES · ROOM 1

1. Room dimensions 354 × 315 cm and ceiling height 280 cm are as measured on site. All other dimensions are estimated from the photographs and should be verified before setting out.
2. Wall A is exposed brick with a projecting brick pier at the A/D corner carrying a surface conduit, heat detector and a wall mounted fan.
3. Wall C is a glazed steel partition with a pair of doors, solid lower panels and glazing above to a transom at door head height.
4. Wall D carries an unused TV wall bracket plate with a twin socket below and a light switch near the door end.
5. Loose furniture (desk, chairs, stool, TV on mobile stand, boxes) is shown in its photographed position and is indicative only.
6. Wall thicknesses are assumed: brick 22 cm, partitions 12 cm.

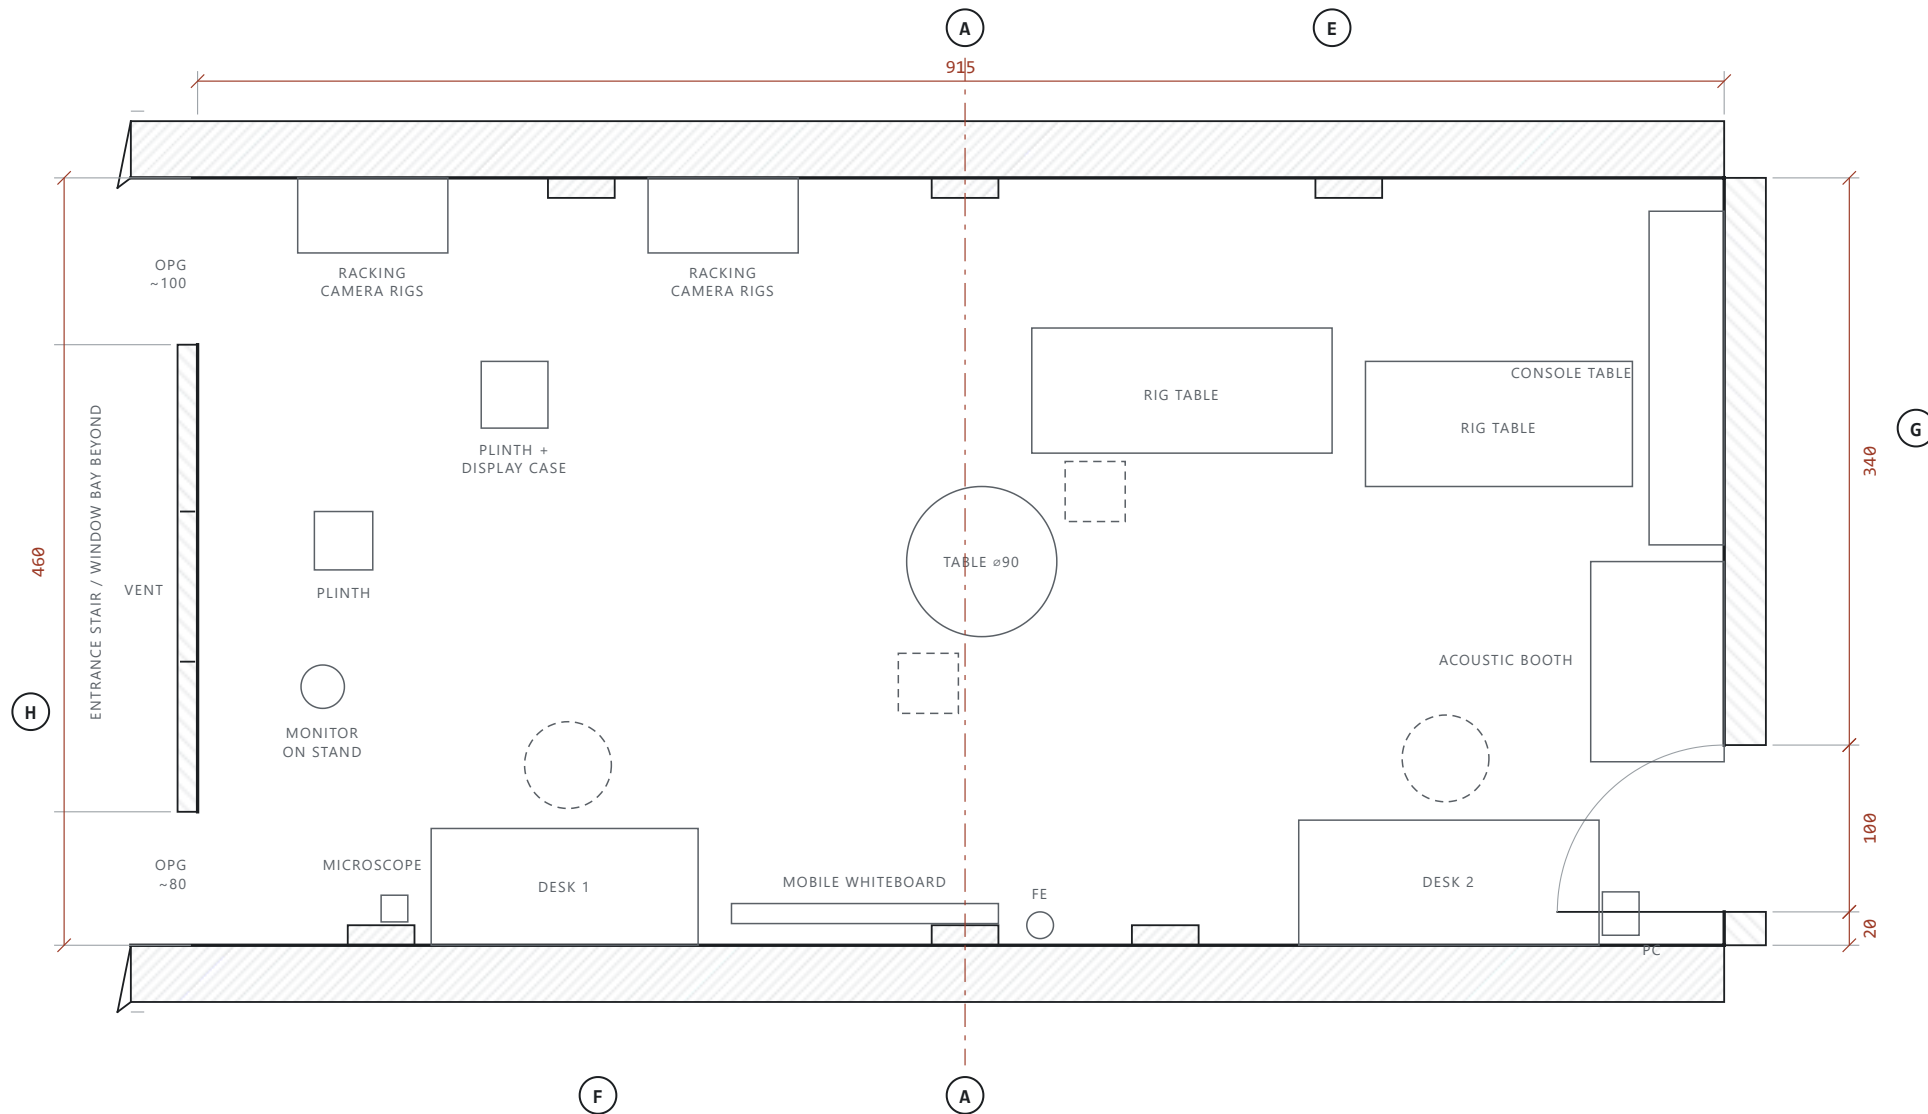


FLOOR PLAN · CAVE



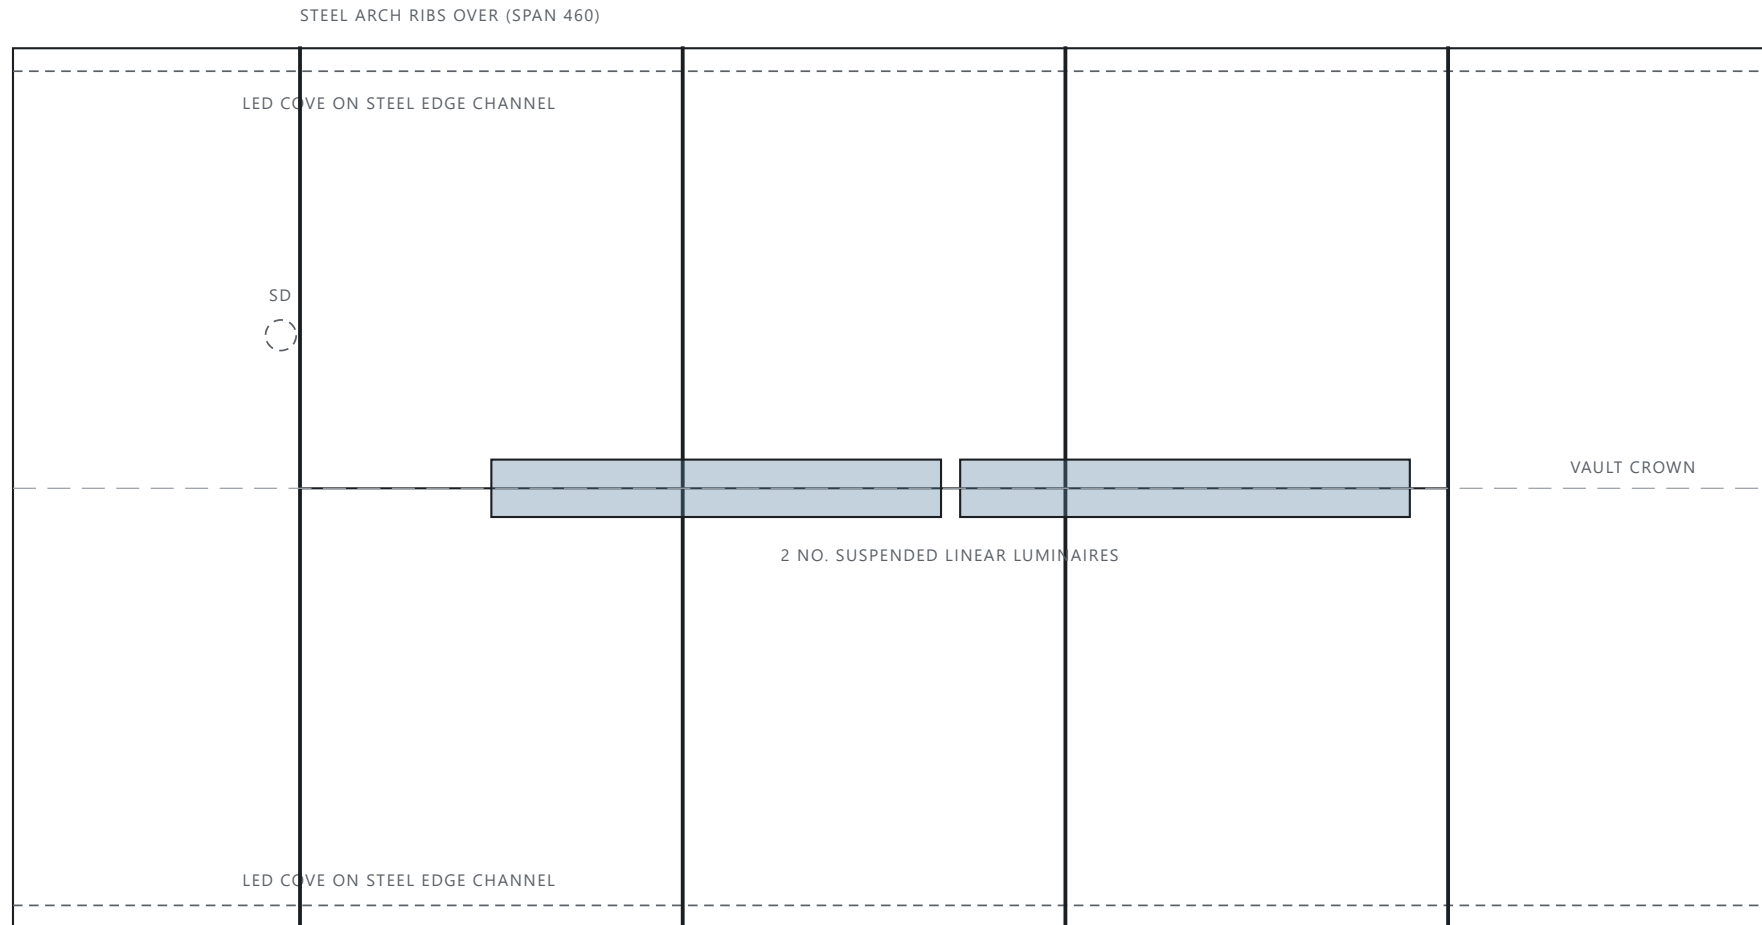


REFLECTED CEILING PLAN · CAVE

VAULT SPRINGING LINE · CROWN AT 290 ABOVE FFL

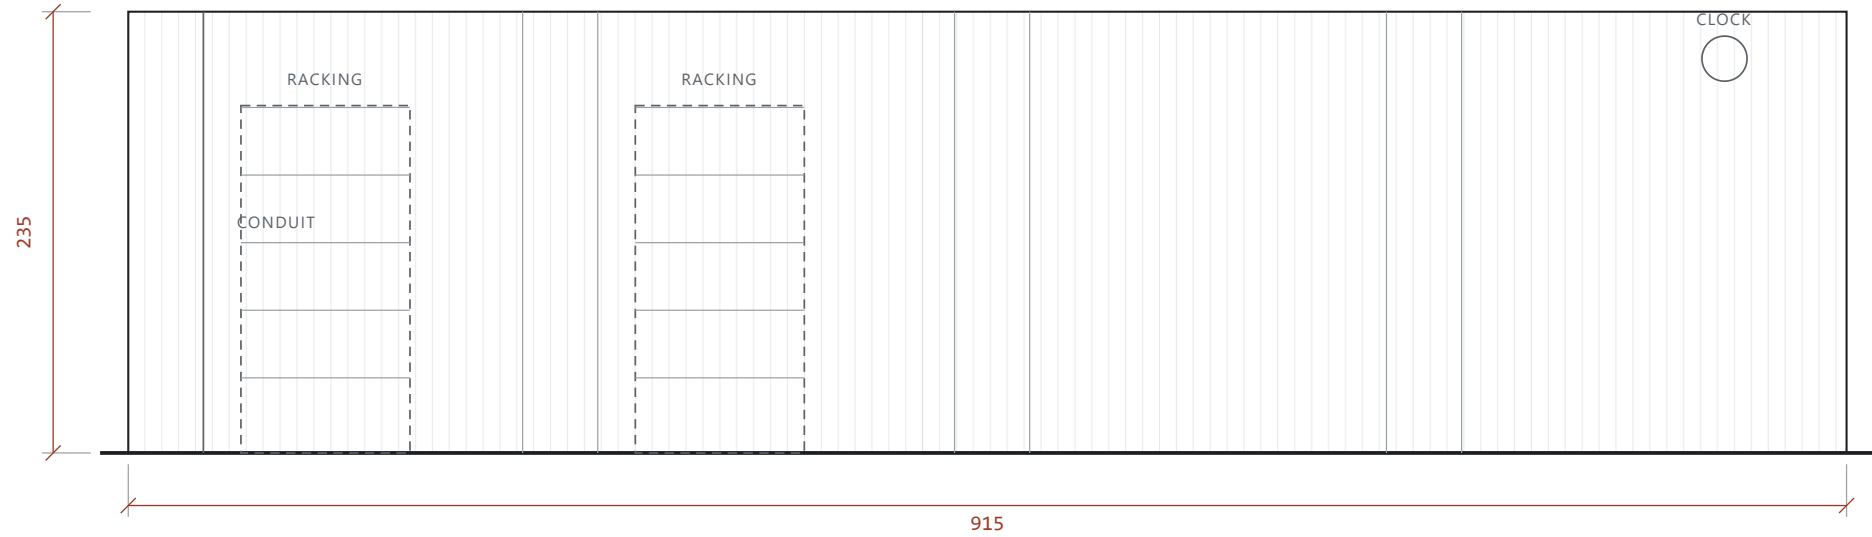

ELEVATION E · NORTH WALL
EXPOSED BRICK · LED COVE AT SPRINGING

VAULT SPRINGING LINE · CROWN AT 290 ABOVE FFL

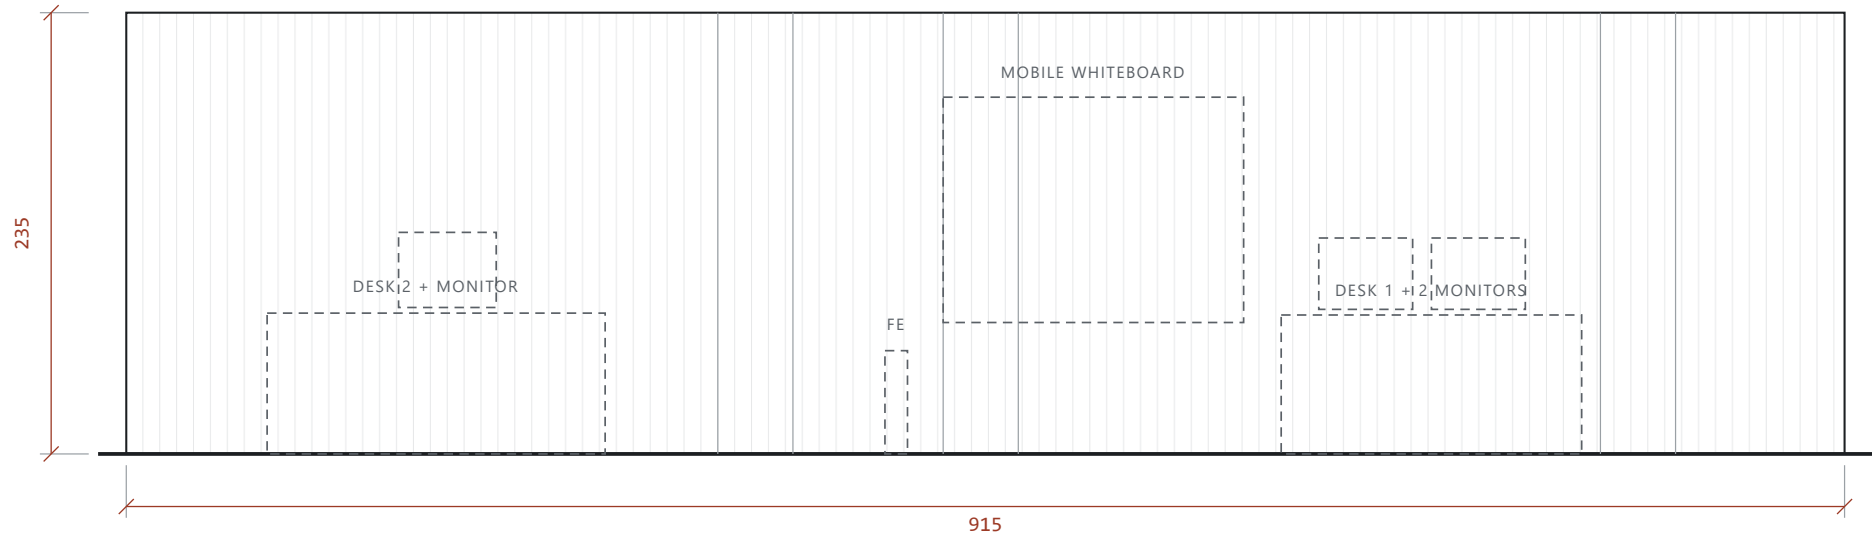

ELEVATION F · SOUTH WALL
EXPOSED BRICK · LED COVE AT SPRINGING


SHEET
A-04 CAVE LONG ELEVATIONS

PROJECT
OFFICE ROOM SURVEY


DATE
10 JUL 2026

DRAWN
NETHOLABS


KEY
MARKERS E-H + SECTION A-A ON PLAN

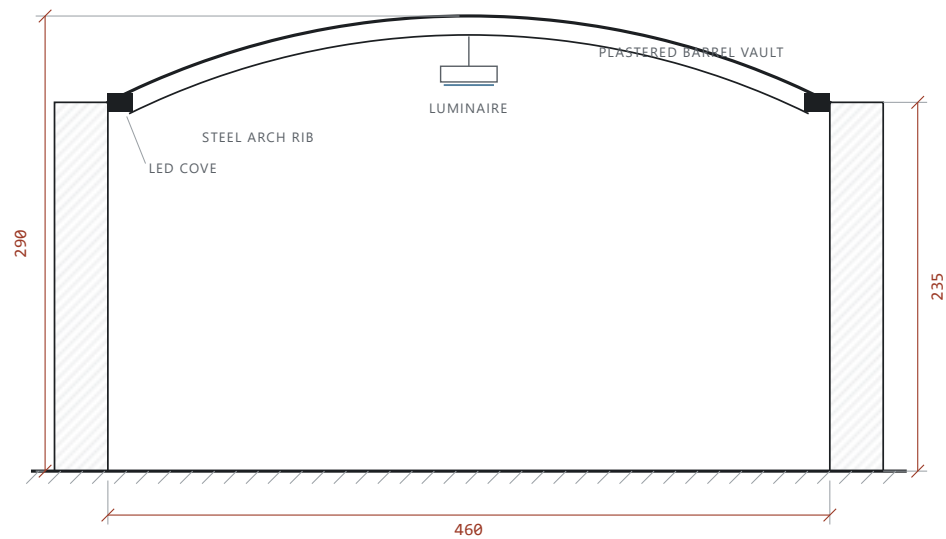

SECTION A-A
LOOKING EAST

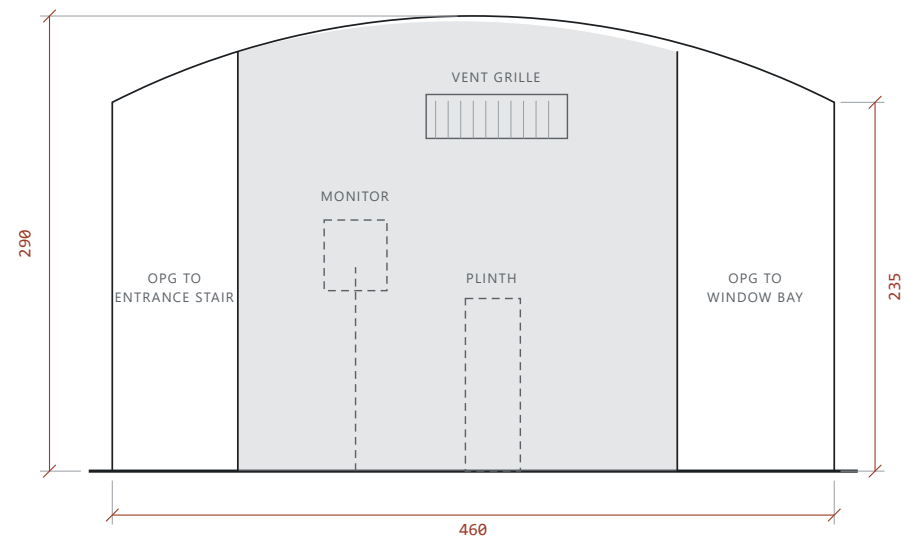


ELEVATION H · WEST END
GREEN PARTITION · OPEN BOTH SIDES

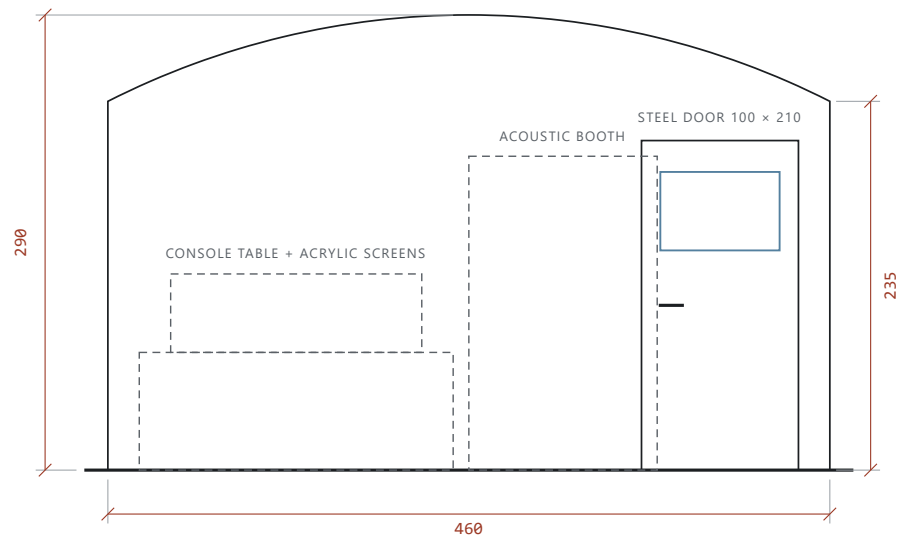

ELEVATION G · EAST END
PLASTERED WALL · STEEL DOOR


SURVEY NOTES · ROOM 2 (CAVE)

1. Plan dimensions 460 × 915 cm and 290 cm height are as measured on site. The 290 is taken as the height at the vault crown; the springing height of 235 cm at the long walls is estimated from the photographs.
2. The ceiling is a shallow plastered barrel vault spanning the 460 cm width, crossed by four steel arch ribs. Two suspended linear luminaires run end to end along the centreline below the ribs, and a continuous LED cove on a steel edge channel washes both long brick walls.
3. Both long walls are exposed brick with projecting piers; pier positions are approximate.
4. The west end is a dark green painted partition with a ventilation grille, open both sides: the south opening leads to the entrance stair and external gate, the north opening to a window bay. The survey extent stops at the partition face.
5. The east end is a white plastered wall with a steel door (vision panel) at the south corner, an acoustic booth and a black console table against it.
6. Loose furniture (desks, racking with camera rigs, rig tables, round table, plinths, mobile whiteboard) is shown in its photographed position and is indicative only.

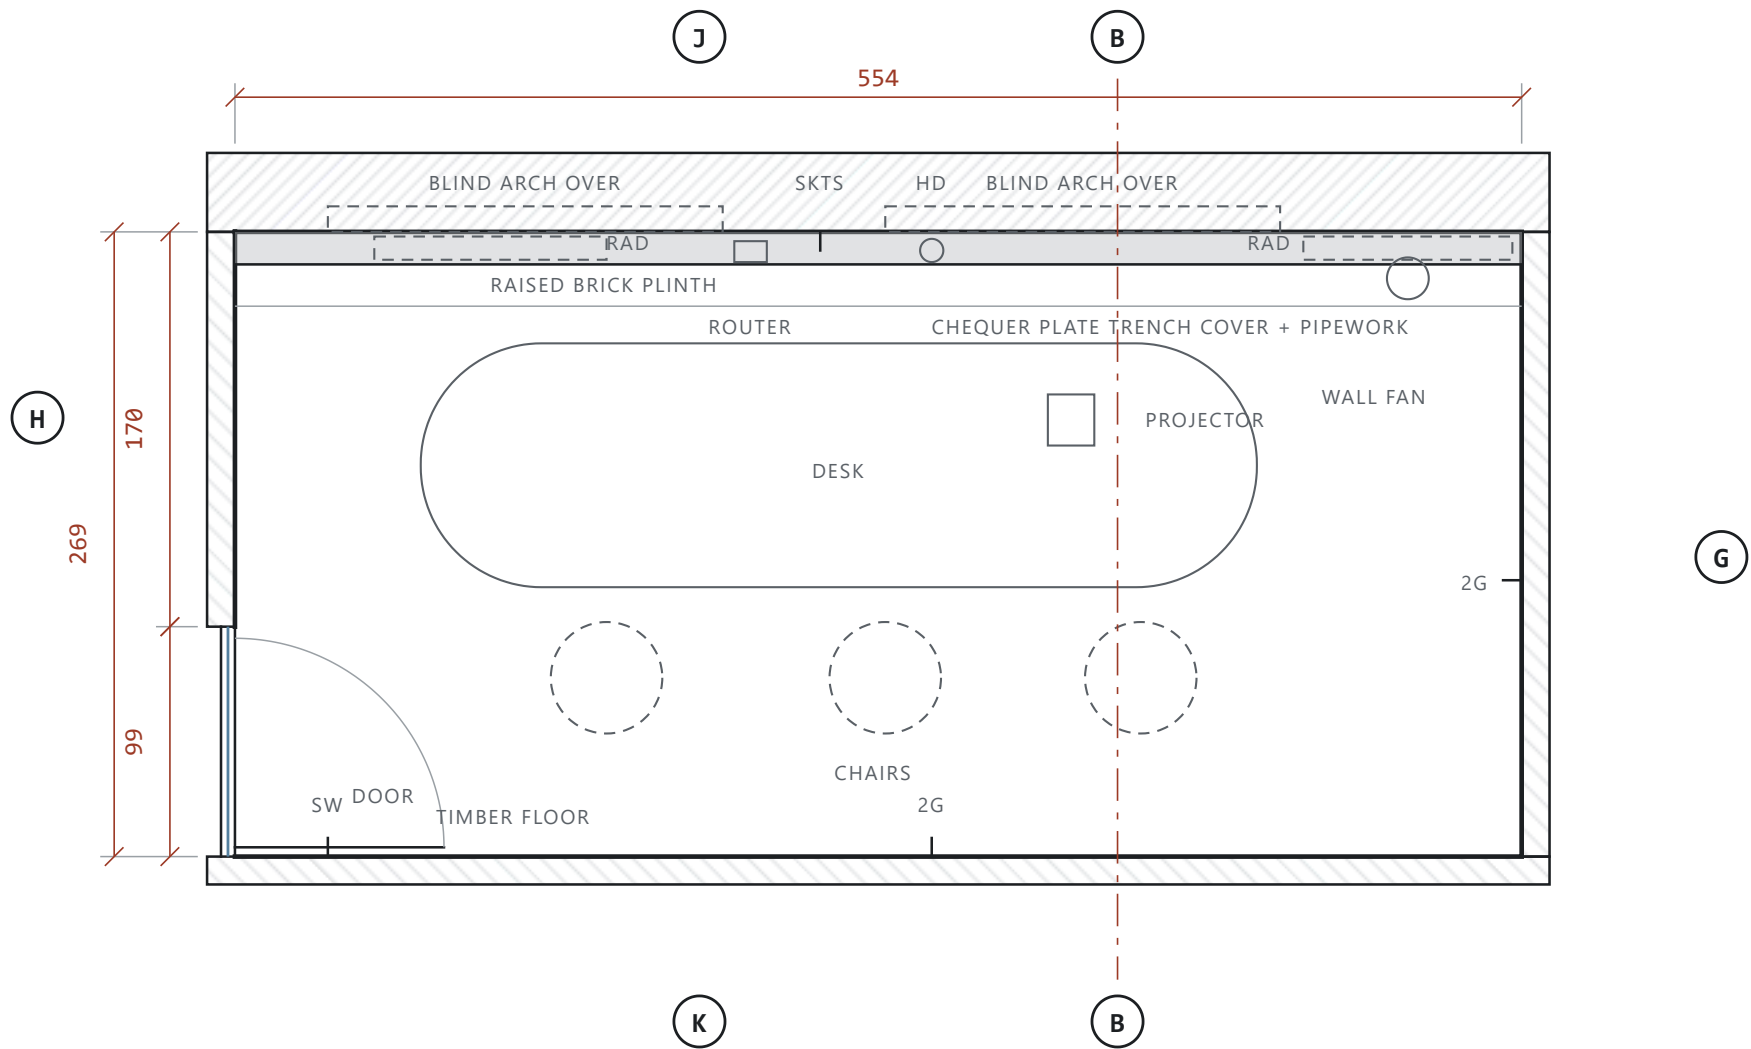


FLOOR PLAN · LAB


FLAT PLASTER CEILING · H 290

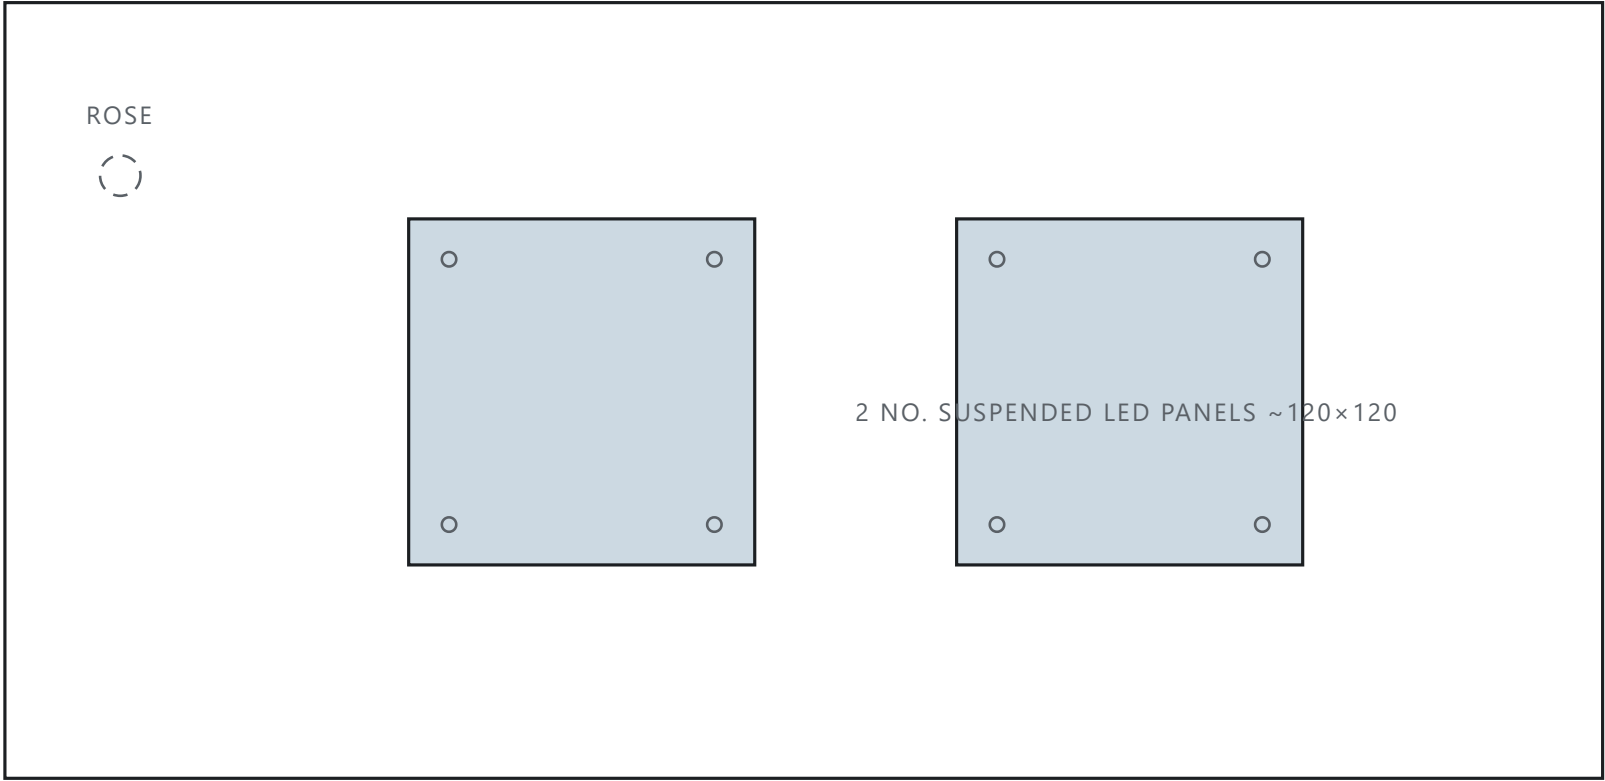


REFLECTED CEILING PLAN · LAB

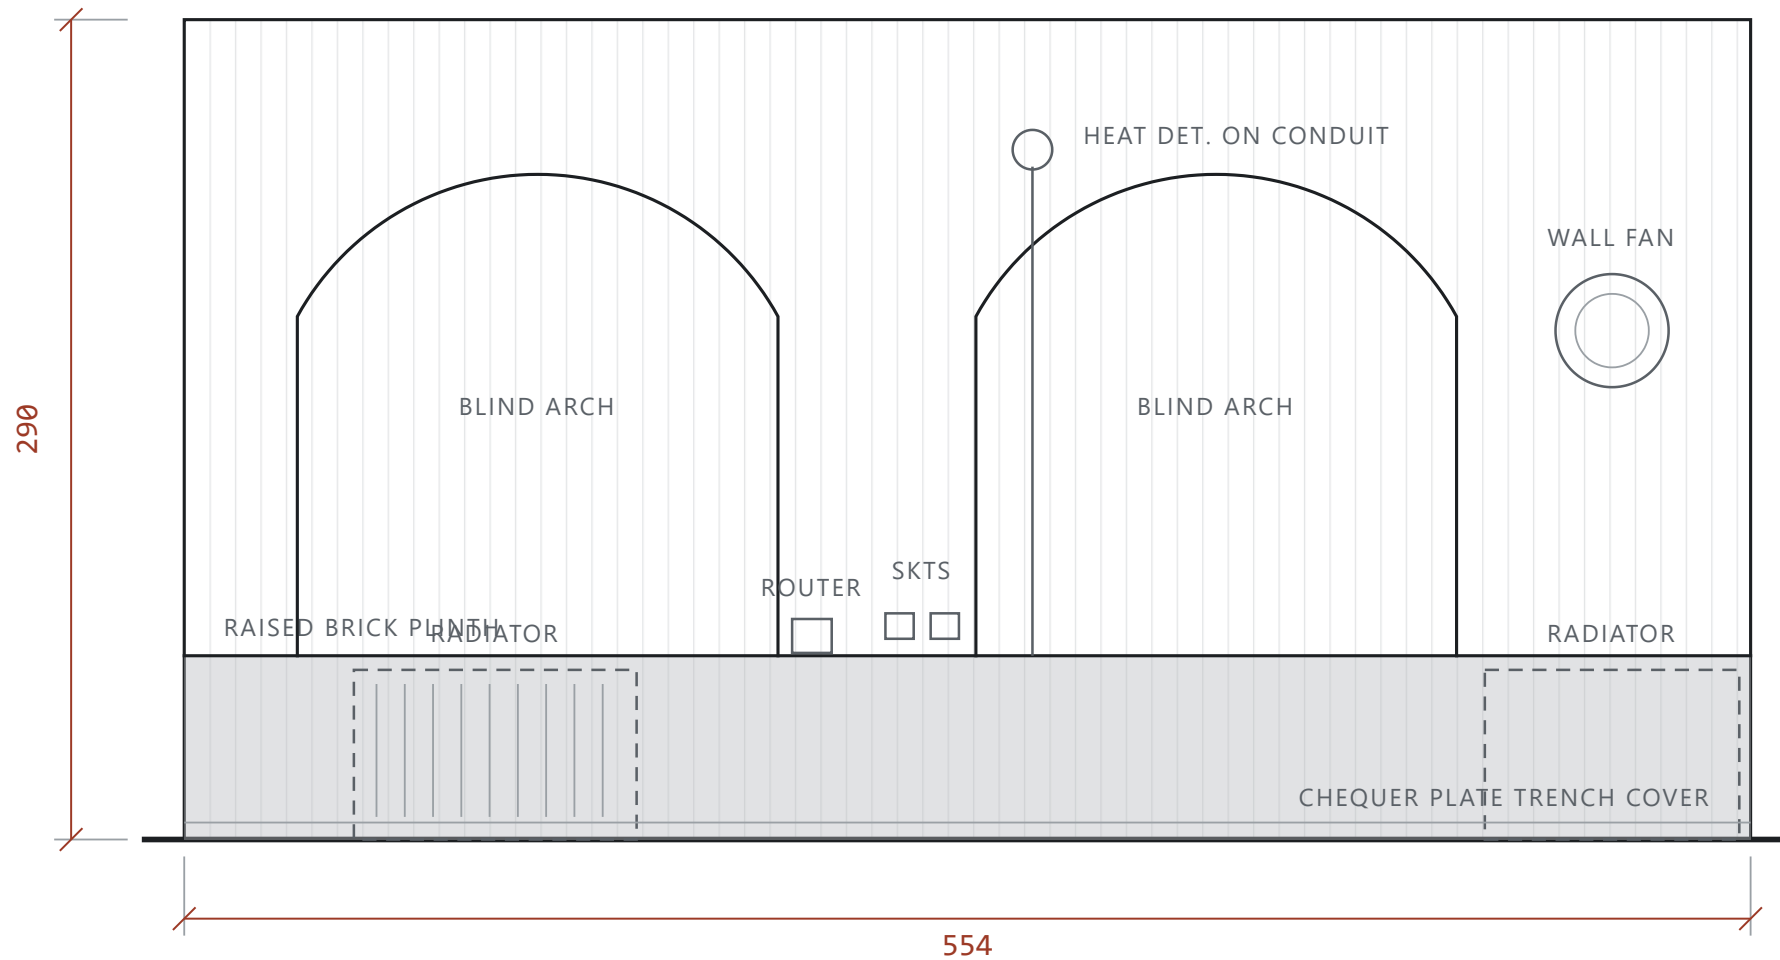


ELEVATION J · NORTH WALL
EXPOSED BRICK · BLIND ARCHES · RAISED PLINTH

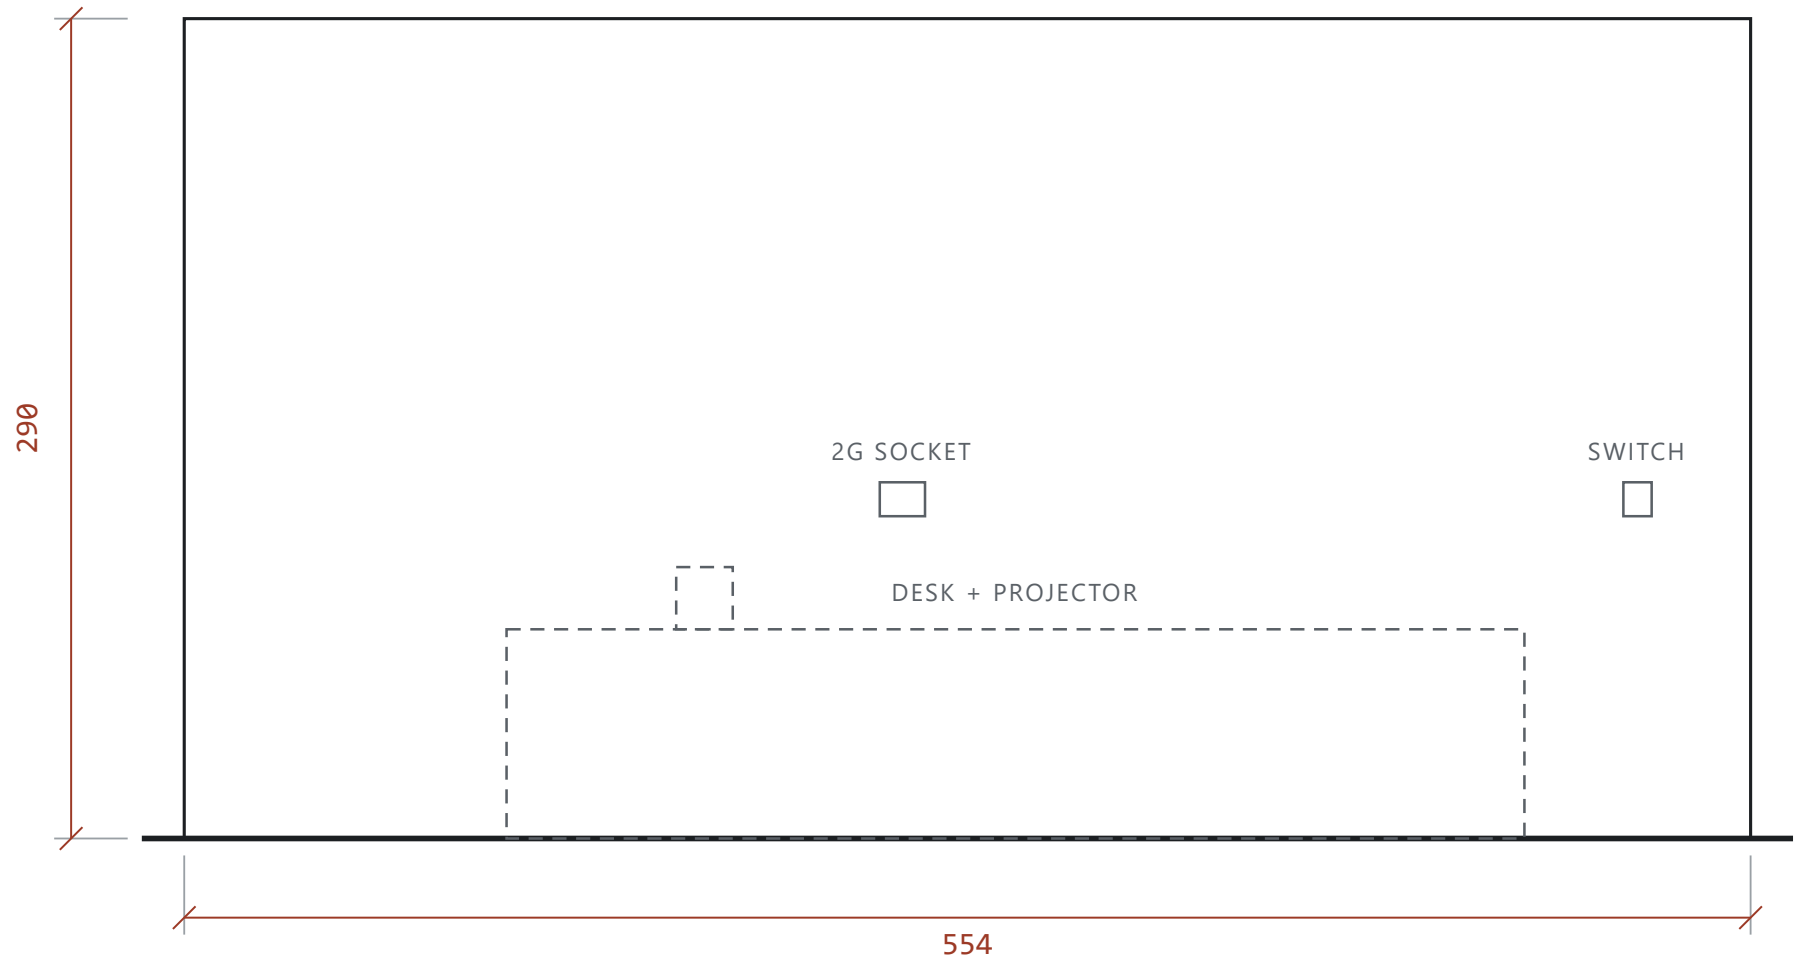


ELEVATION K · SOUTH WALL
PAINTED PLASTER

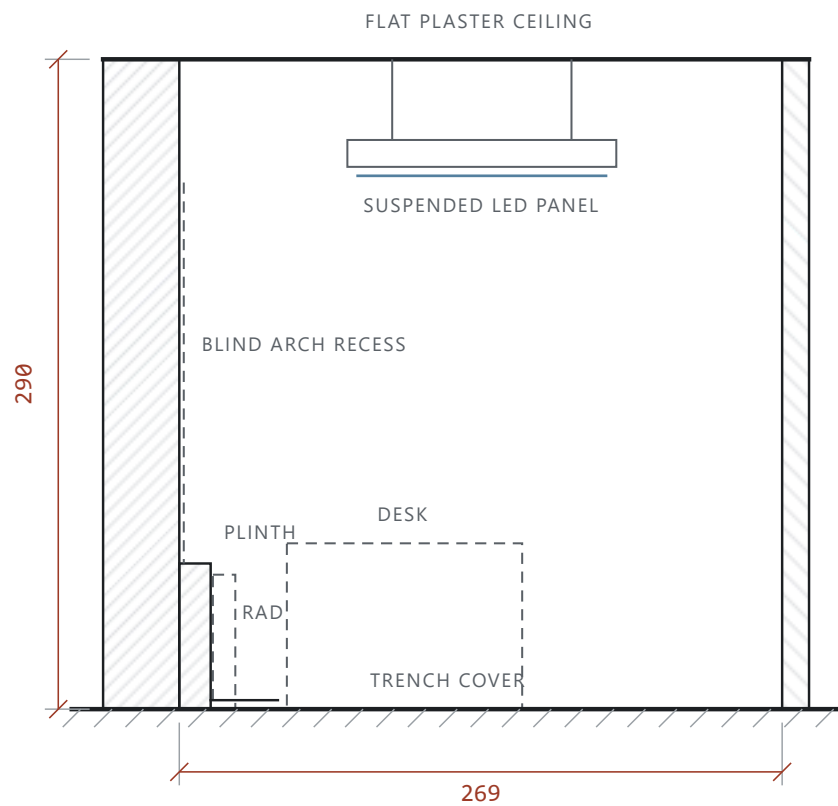

SECTION B-B
LOOKING EAST · CUT AT $x = 380$

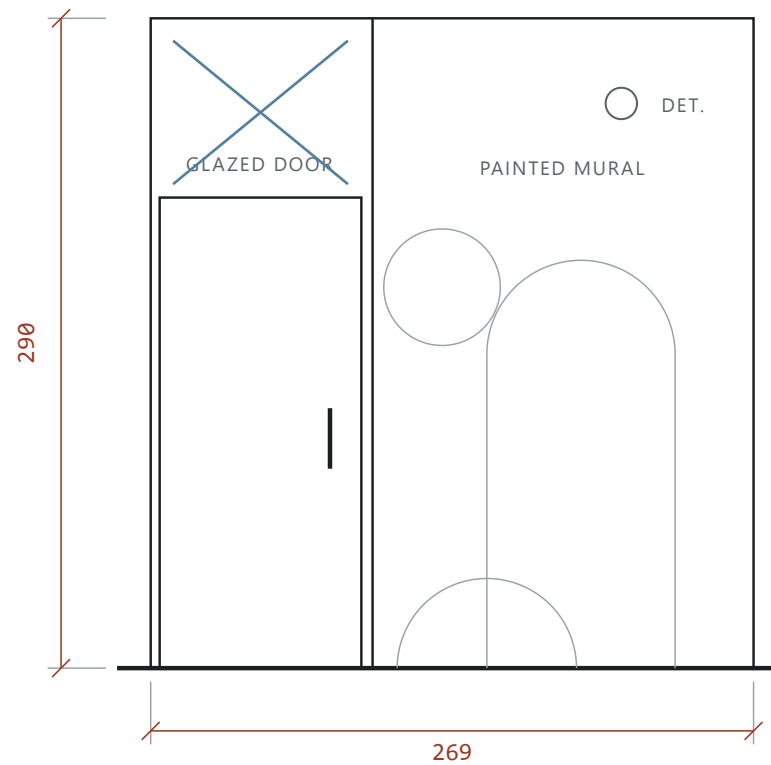

ELEVATION H · WEST END
PAINTED MURAL · GLAZED SCREEN + DOOR AT SOUTH

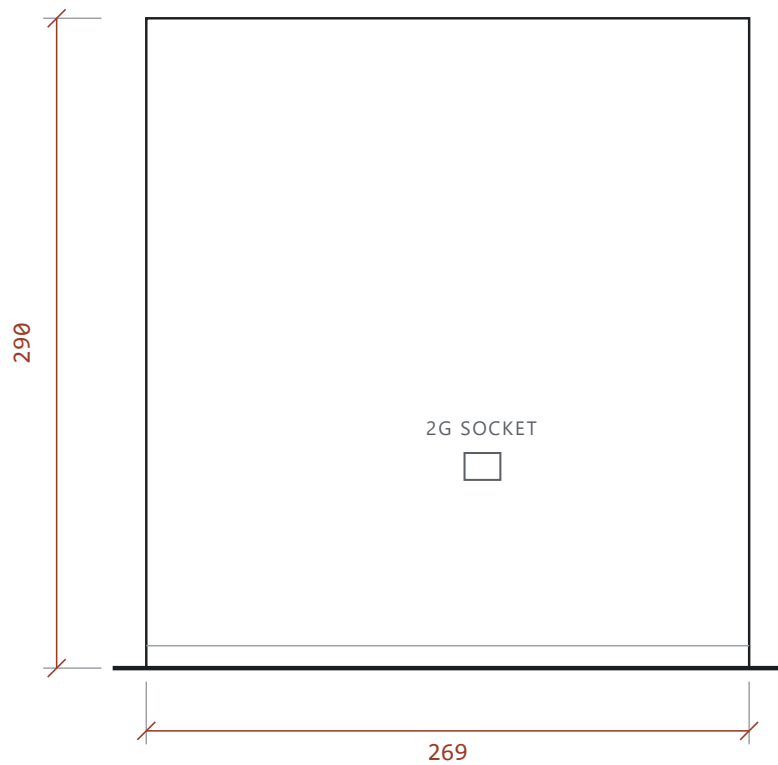

ELEVATION G · EAST END
PAINTED PLASTER

SHEET
A-08 LAB SECTION + END ELEVATIONS

PROJECT
OFFICE ROOM SURVEY


DATE
10 JUL 2026

DRAWN
NETHOLABS


KEY
SECTION B-B CUT AT X = 380, LOOKING EAST


SURVEY NOTES · ROOM 3 (LAB) · RESURVEYED 10 JUL 2026

1. Plan dimensions 554 × 269 cm and 290 cm height are as measured on site. The ceiling is flat painted plaster at 290, carrying two large suspended LED panels (approx. 120 × 120) on drop rods.
2. The north long wall is exposed brick with two blind arch recesses (springing approx. 185, crown approx. 235) over a raised brick plinth approx. 65 high. A steel chequer plate trench cover with heating pipework runs along its base.
3. On the brick wall: two radiators, the WiFi router and a socket cluster on the plinth, a heat detector on vertical flexible conduit, and a wall mounted fan near the east end.
4. The west end is the painted geometric mural wall, with a glazed screen and door at its south corner leading to the corridor and stair.
5. The south long wall and east end wall are plain painted plaster with a twin socket on each and a light switch beside the west door.
6. The floor is timber boards throughout. The pill shaped desk with projector and the chairs are shown in photographed positions and are indicative only.

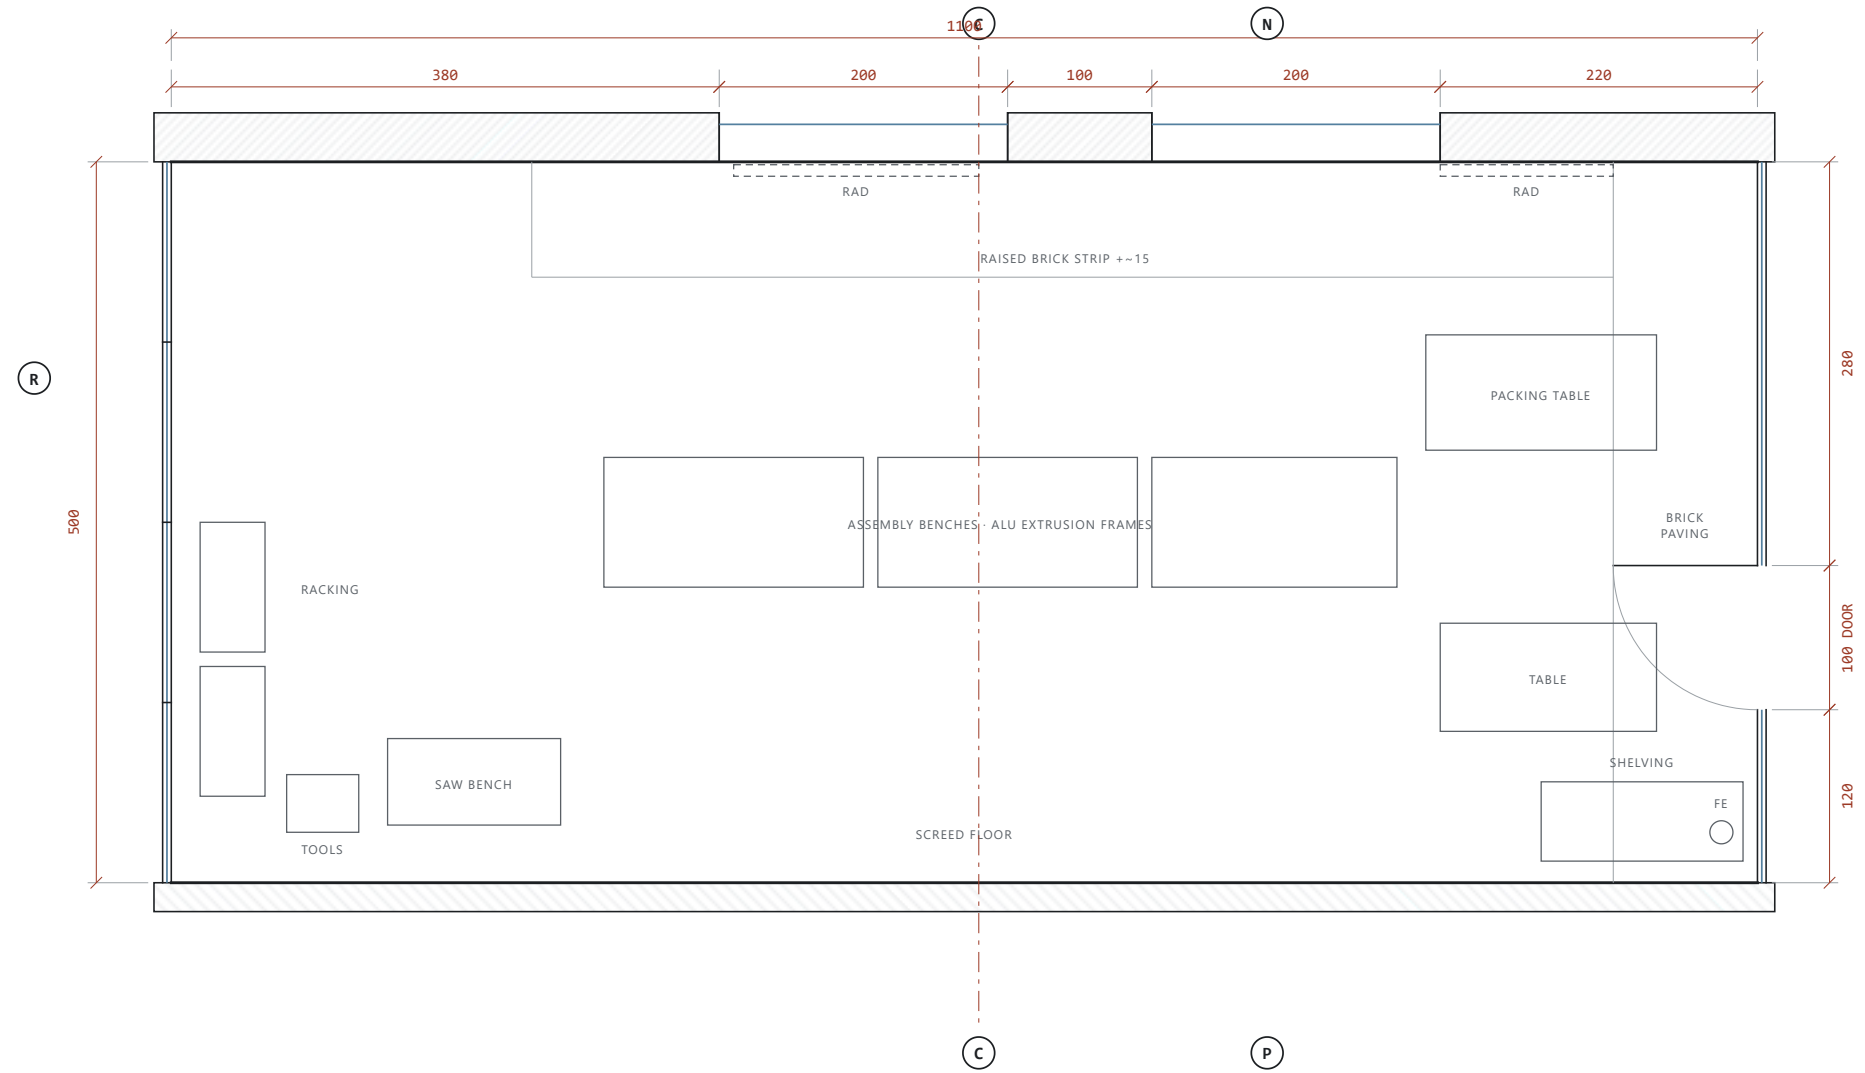


FLOOR PLAN · ENGINEERING




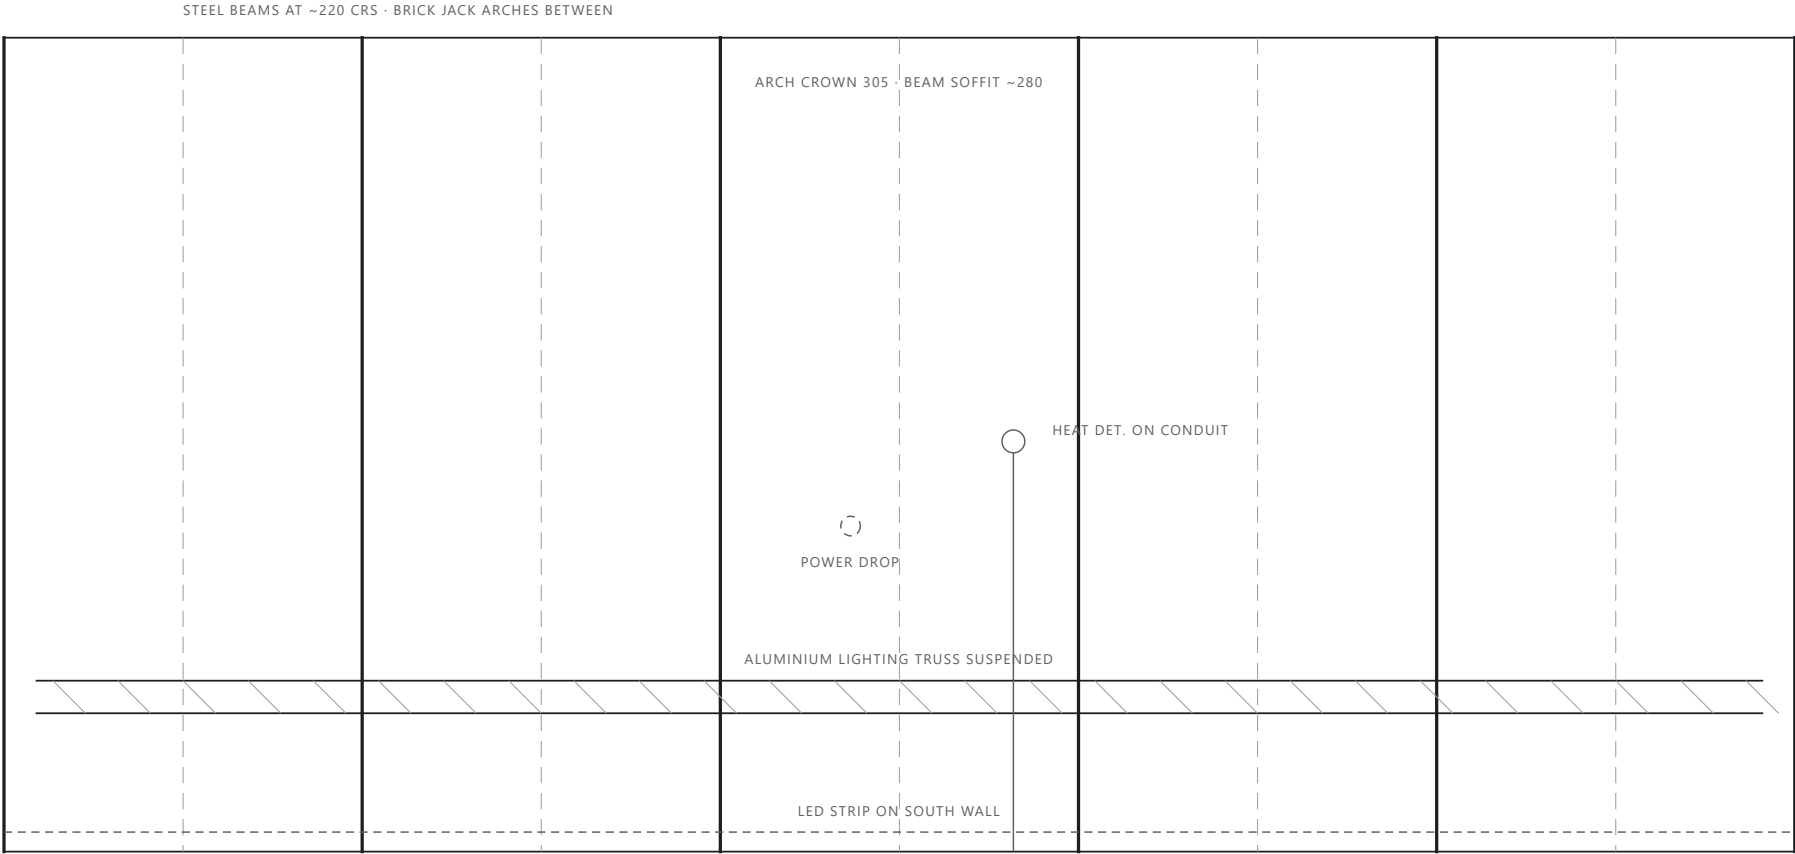

REFLECTED CEILING PLAN · ENGINEERING

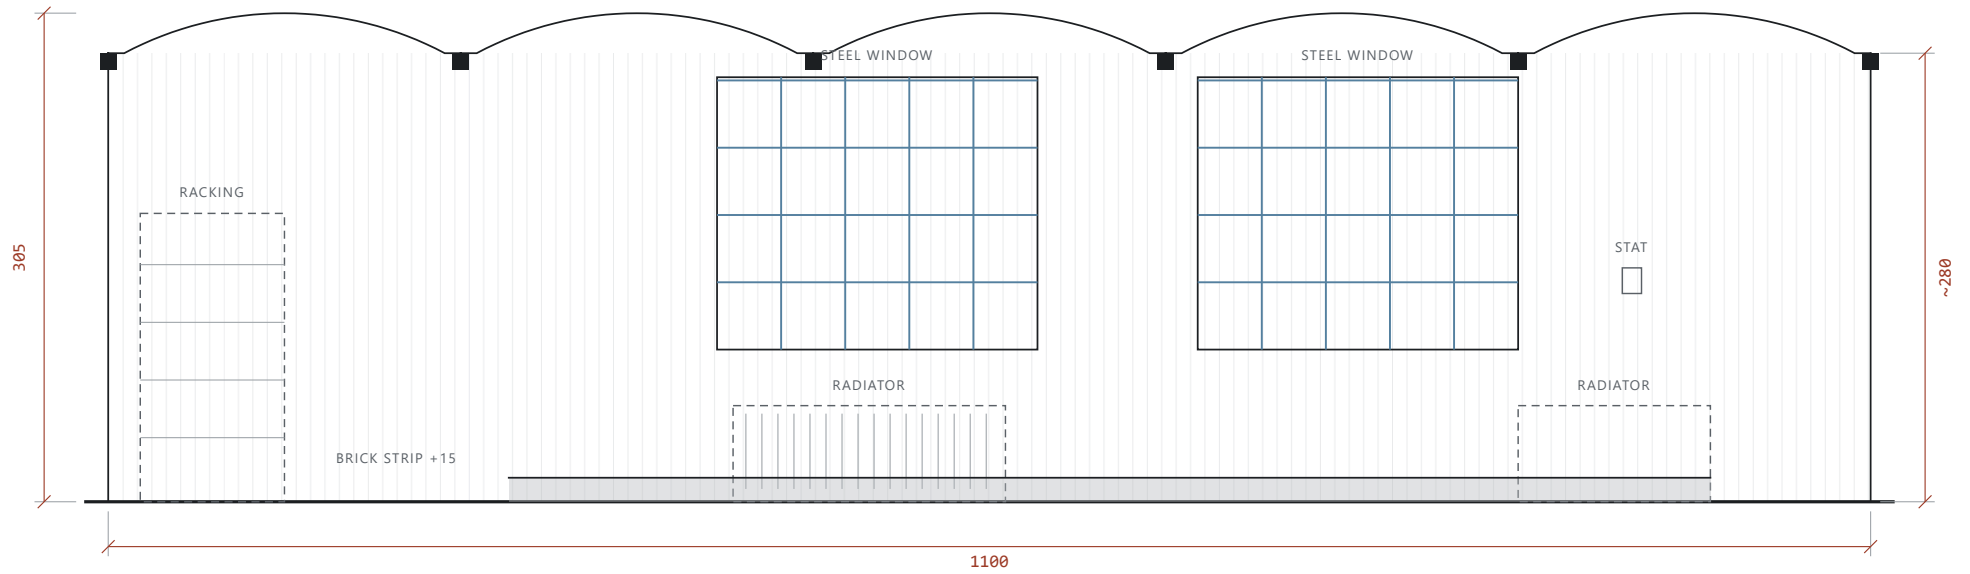

ELEVATION N · NORTH WALL
EXPOSED BRICK · STEEL WINDOWS · RAISED BRICK STRIP AT BASE

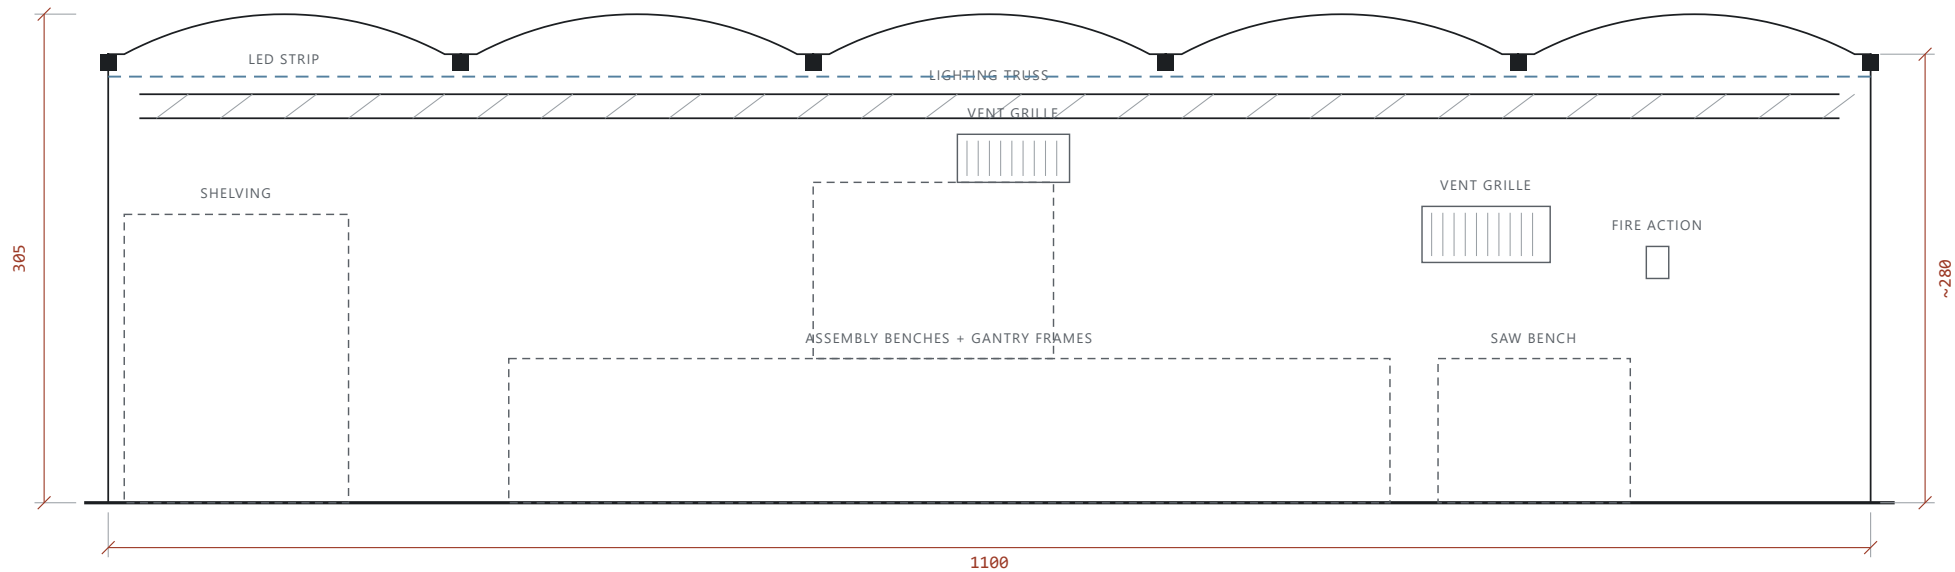

ELEVATION P · SOUTH WALL
POLISHED PLASTER · SUSPENDED LIGHTING TRUSS + LED STRIP


SHEET
A-10 ENGINEERING LONG ELEVATIONS

PROJECT
OFFICE ROOM SURVEY


DATE
10 JUL 2026

DRAWN
NETHOLABS


KEY
MARKERS N-R + SECTION C-C ON PLAN

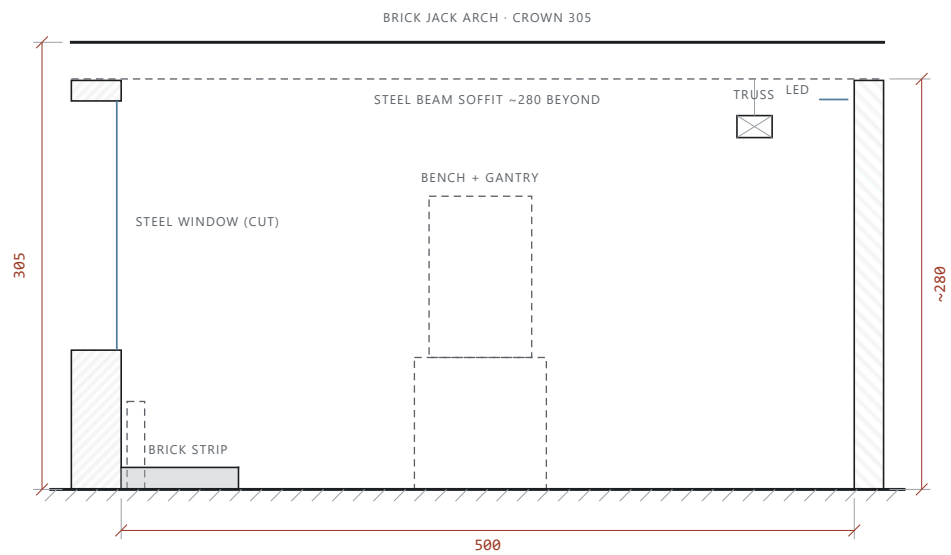

SECTION C-C
LOOKING EAST

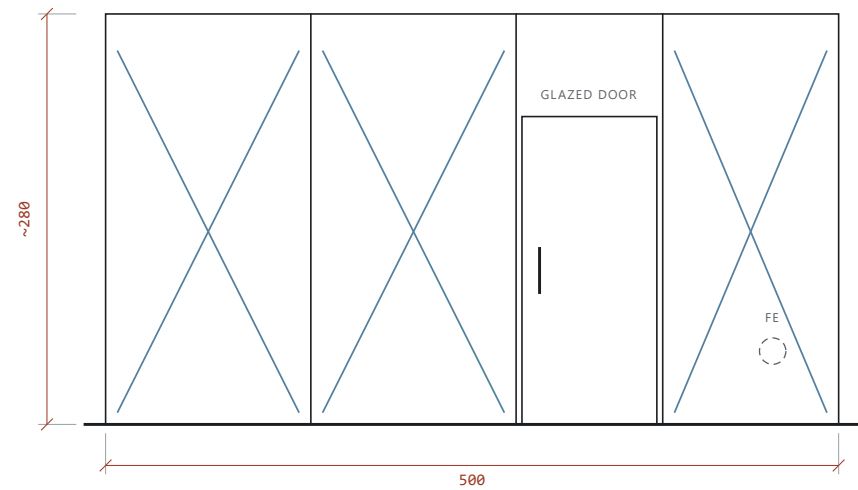

ELEVATION Q · EAST END
GLAZED SCREEN + DOOR TO CORRIDOR

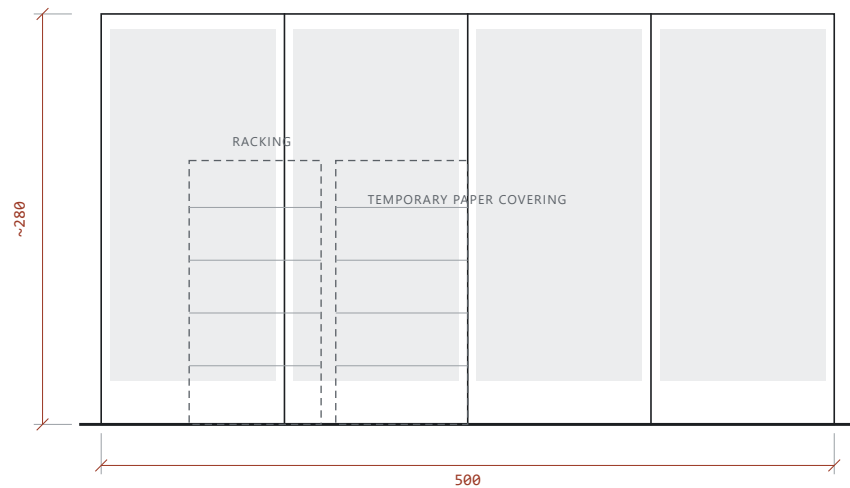

ELEVATION R · WEST END
GLAZED SCREEN · PAPERED OVER · KITCHEN BEYOND

SHEET
A-11 ENGINEERING SECTION + END ELEVATIONS

PROJECT
OFFICE ROOM SURVEY


DATE
10 JUL 2026

DRAWN
NETHOLABS


KEY
SECTION C-C CUT AT X = 560, LOOKING EAST

SURVEY NOTES · ROOM 4 (ENGINEERING)

1. Plan dimensions 500 × 1100 cm and 305 cm height are as measured on site. The 305 is taken at the crown of the brick jack arches; the steel beam soffit at 280 cm is estimated from the photographs.
2. The ceiling is brick jack arches spanning between steel beams that cross the 500 cm width at roughly 220 cm centres. An aluminium lighting truss is suspended along the south wall with a continuous LED strip on the wall behind it.
3. The north long wall is exposed brick with two large steel framed windows with deep reveals and radiators below. A raised brick paving strip with a step runs along its base, and brick paving continues as a band across the entrance end.
4. The south long wall is polished plaster carrying two ventilation grilles, a fire action notice and a room thermostat.
5. The east end is a glazed screen with a door to the corridor. The west end is a glazed screen, temporarily papered over, to the kitchen space beyond.
6. The room was in fit out when photographed: assembly benches, racking, packing tables, saw bench and boxes are shown indicatively and will move.

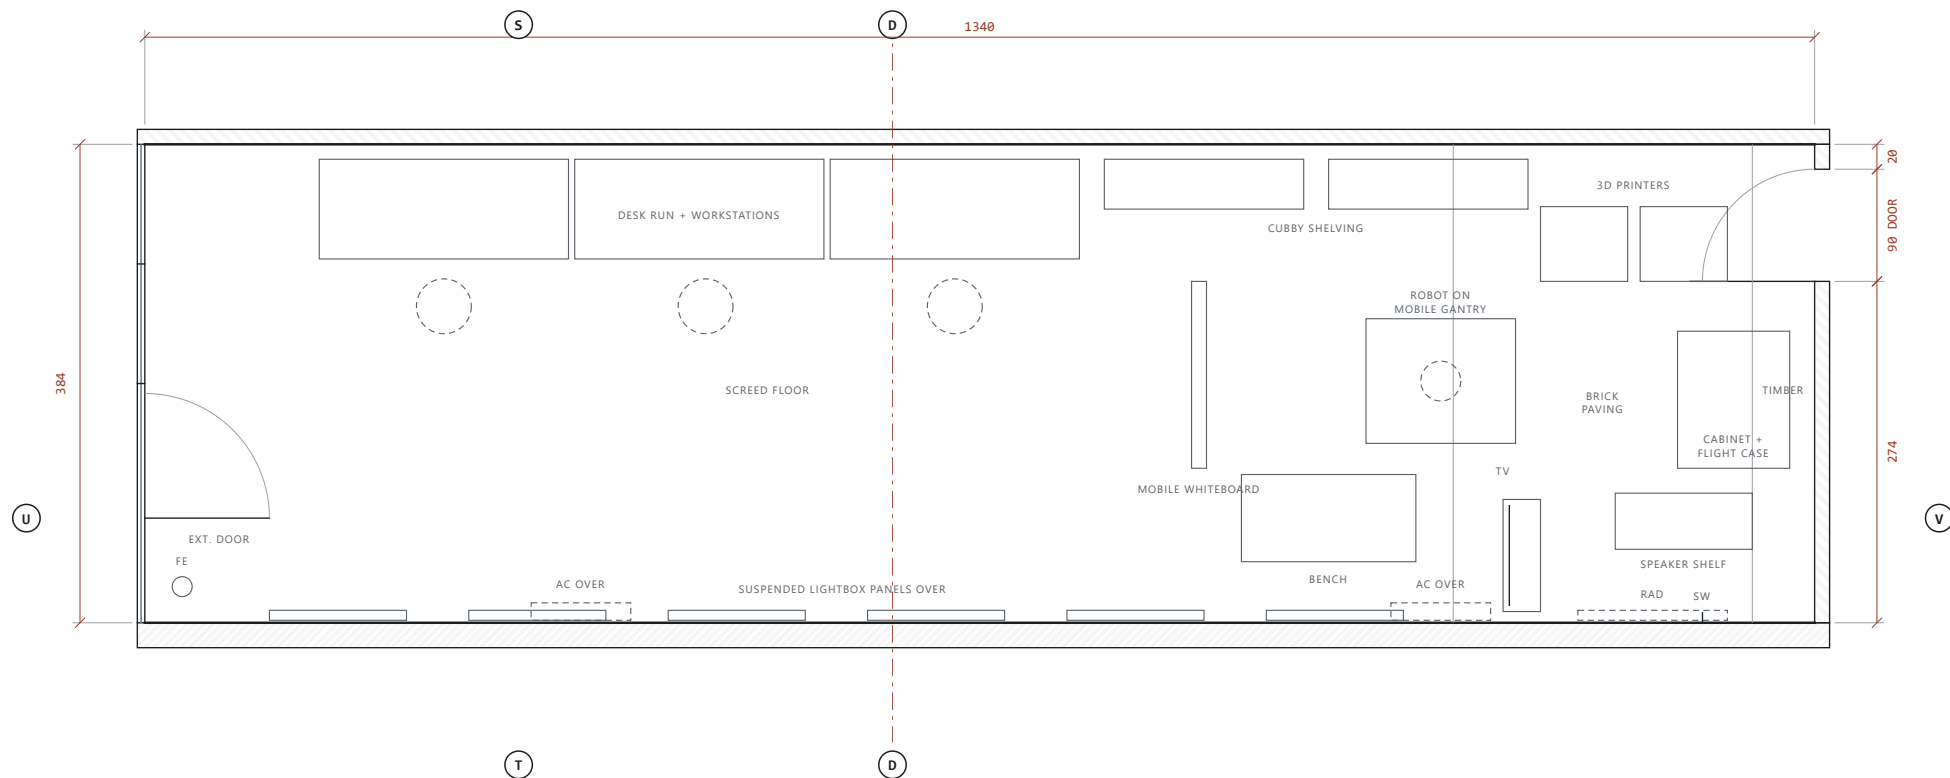


FLOOR PLAN · ROBOTICS




BRICK ARCH BANDS



REFLECTED CEILING PLAN · ROBOTICS
BRICK BARREL VAULT SPANNING 384

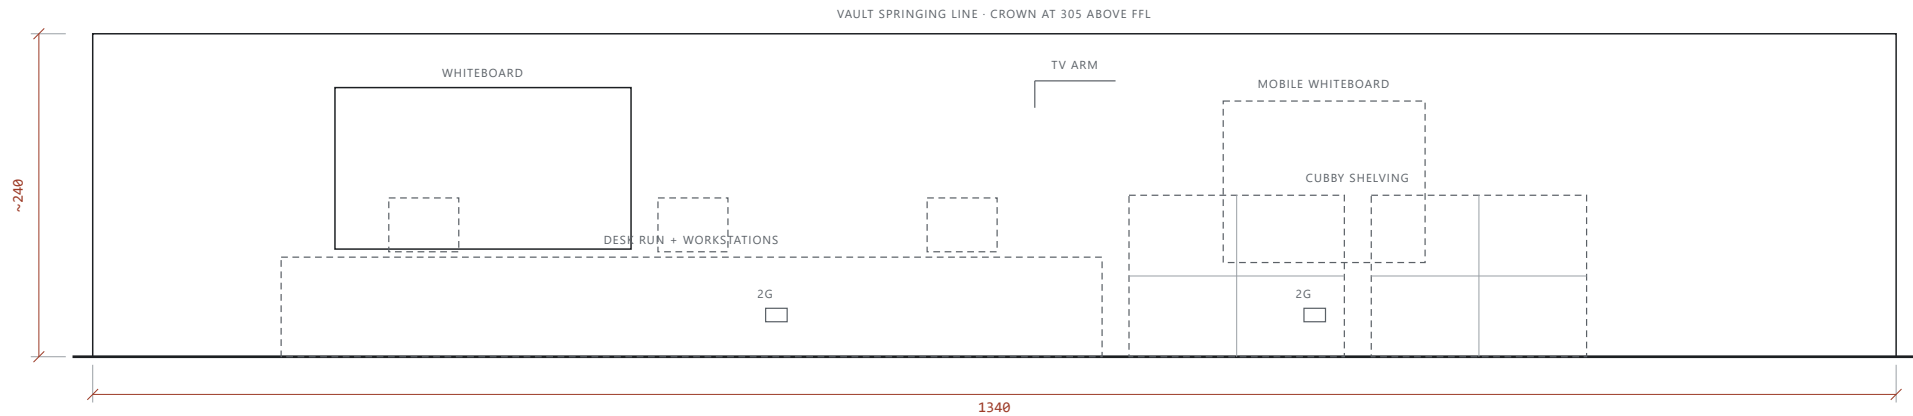

ELEVATION S · NORTH WALL
PAINTED PLASTER · WHITEBOARD · DESK RUN

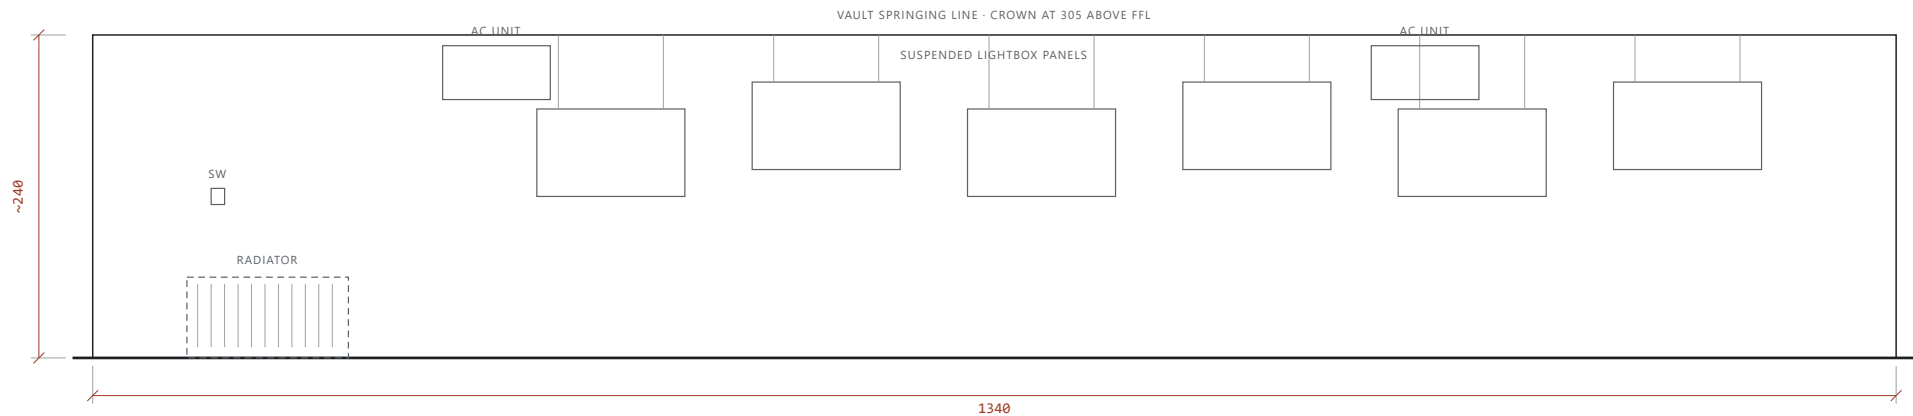

ELEVATION T · SOUTH WALL
POLISHED PLASTER · SUSPENDED LIGHTBOX ROW · AC UNITS

SHEET

A-13 ROBOTICS LONG ELEVATIONS

PROJECT

OFFICE ROOM SURVEY

DATE


10 JUL 2026

DRAWN


NETHOLABS

KEY


MARKERS S-V + SECTION D-D ON PLAN

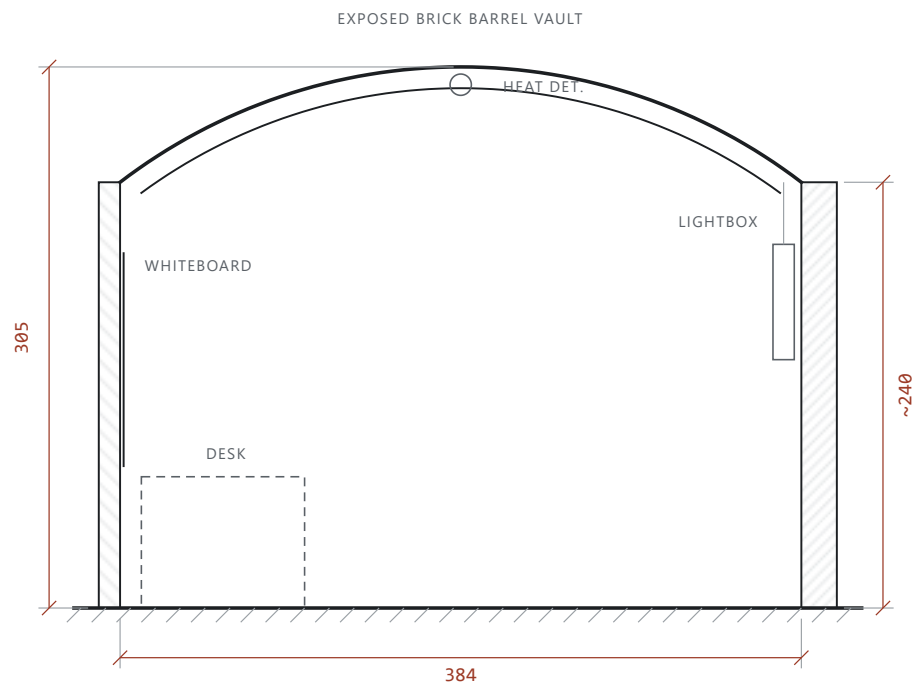

SECTION D-D
LOOKING EAST

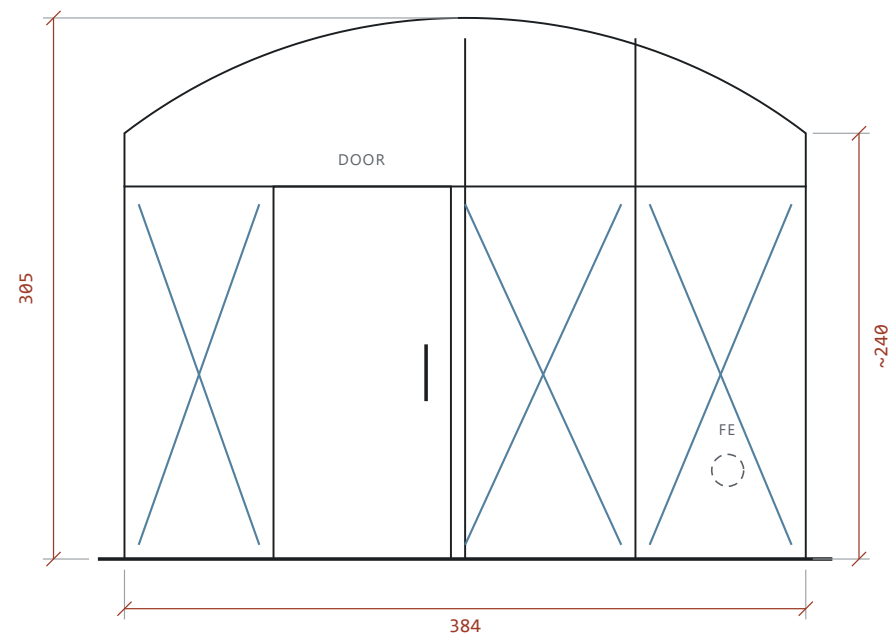

ELEVATION U · WEST END
EXTERNAL STEEL GLAZED SCREEN + DOOR

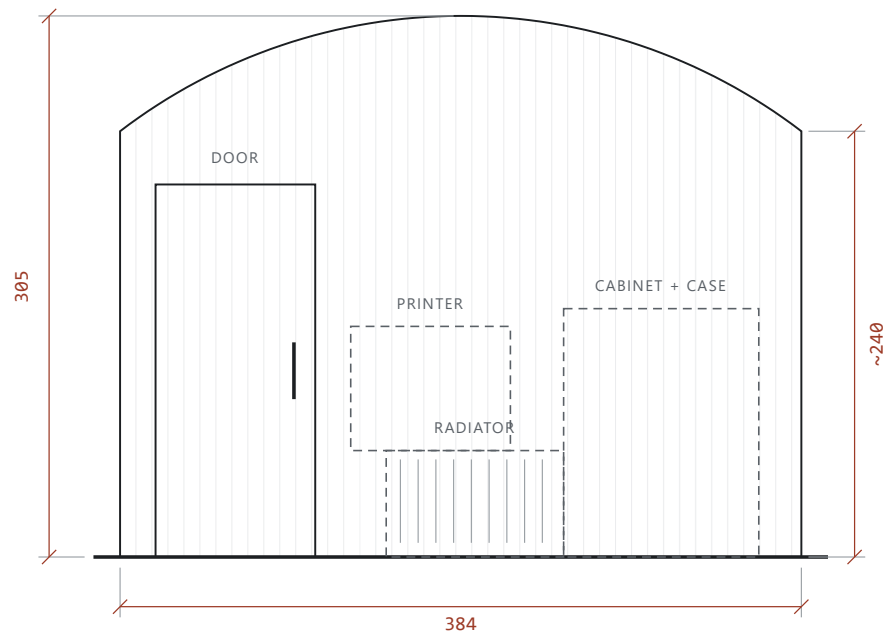

ELEVATION V · EAST END
DOOR TO CORRIDOR (ASSUMED) · BRICK PAVED ZONE

SHEET
A-14 ROBOTICS SECTION + END ELEVATIONS

PROJECT
OFFICE ROOM SURVEY

DATE
10 JUL 2026

DRAWN
NETHOLABS

KEY
SECTION D-D CUT AT X = 600, LOOKING EAST


SURVEY NOTES · ROOM 5 (ROBOTICS)

1. Plan dimensions 384 × 1340 cm and 305 cm height are as measured on site. The 305 is taken at the crown of the exposed brick barrel vault; the springing height of 240 cm at the long walls is estimated from the photographs.
2. The vault spans the 384 cm width with projecting brick arch bands and heat detectors on flexible conduit at the crown.
3. The south long wall is polished plaster carrying a row of suspended lightbox panels on cable hangers at staggered heights, two wall mounted AC units at high level, light switches and a radiator at the east end.
4. The north long wall is painted plaster with a wall mounted whiteboard, a TV swing arm and sockets; the desk run with workstation PCs sits against it, with cubby shelving units beyond.
5. The west end is an external steel glazed screen with a door and windows. The east end is brick paved with the 3D printer stands, cabinet with flight case, speaker shelf and TV stand grouped there, and an assumed door to the corridor at its north corner. Floor is screed with brick paving over the east zone.
6. The humanoid robot on its mobile gantry, the mobile whiteboard and all loose furniture are shown in photographed positions and are indicative only.


■ ■ ■ ■ EACH CAMERA'S COVERAGE TINTED IN ITS OWN COLOUR, CODE LABELLED AT THE LENS OVERLAPS READ DARKER · UNTINTED FLOOR = NOT COVERED

USB ~112° 0.8–2.8 M · HQ 6MM 55° 2.5–6.5 M · HQ 16MM 22° 6.5–14 M DASHED LINES = CAPTURE CELL BOUNDARIES · PLANS NOT TO COMMON SCALE


LIVE: THESE PLANS FOLLOW THE LATEST 3D WALKTHROUGH LAYOUT SAVED IN THIS BROWSER

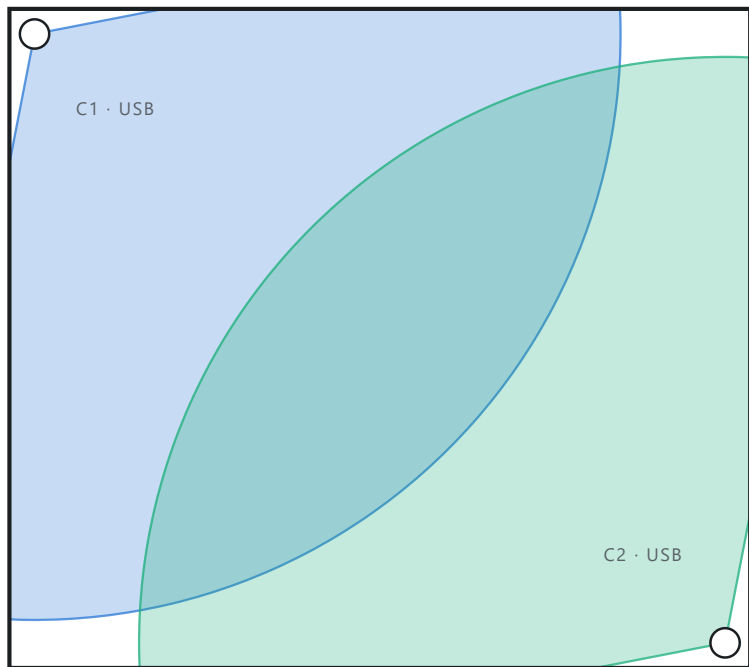


OFFICE · 2 CAMERAS · ISSUED PLAN

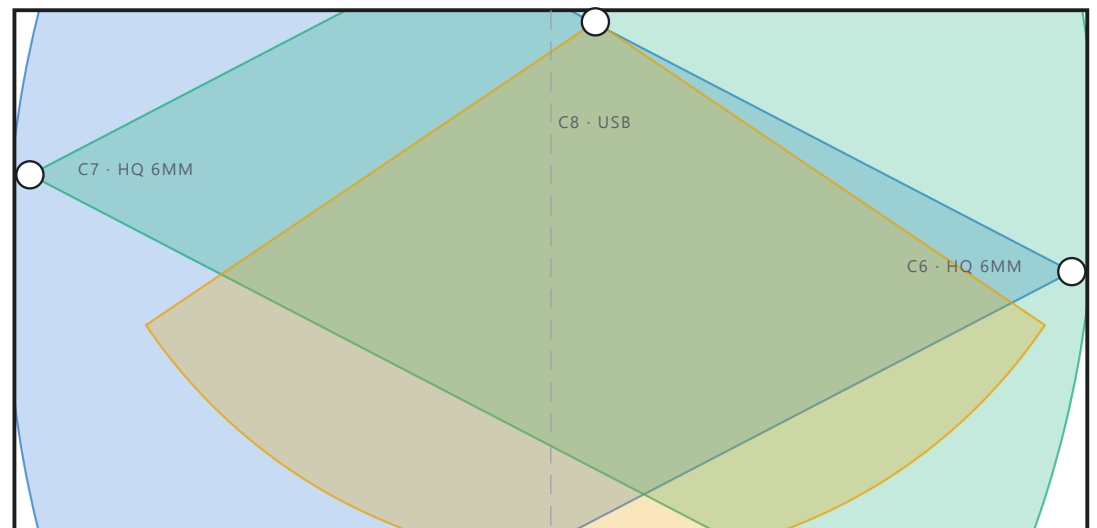


LAB · 3 CAMERAS · ISSUED PLAN

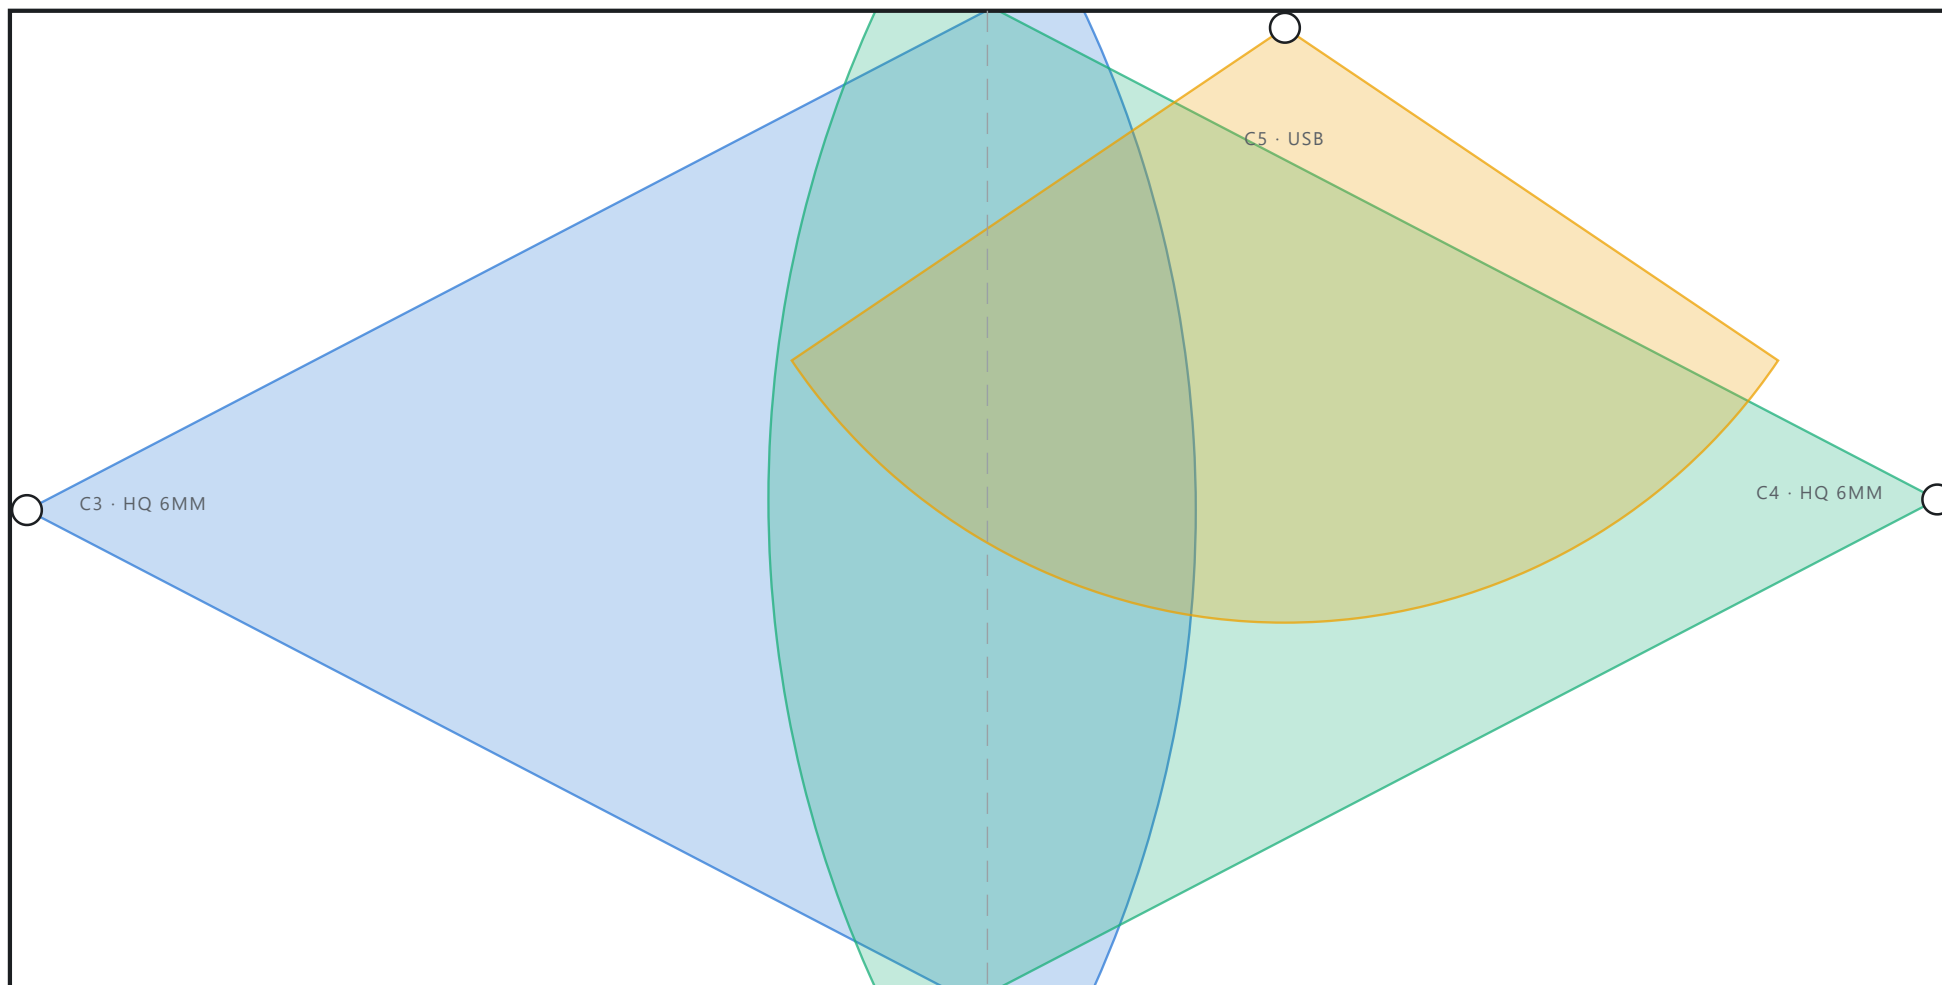

CAVE · 3 CAMERAS · ISSUED PLAN

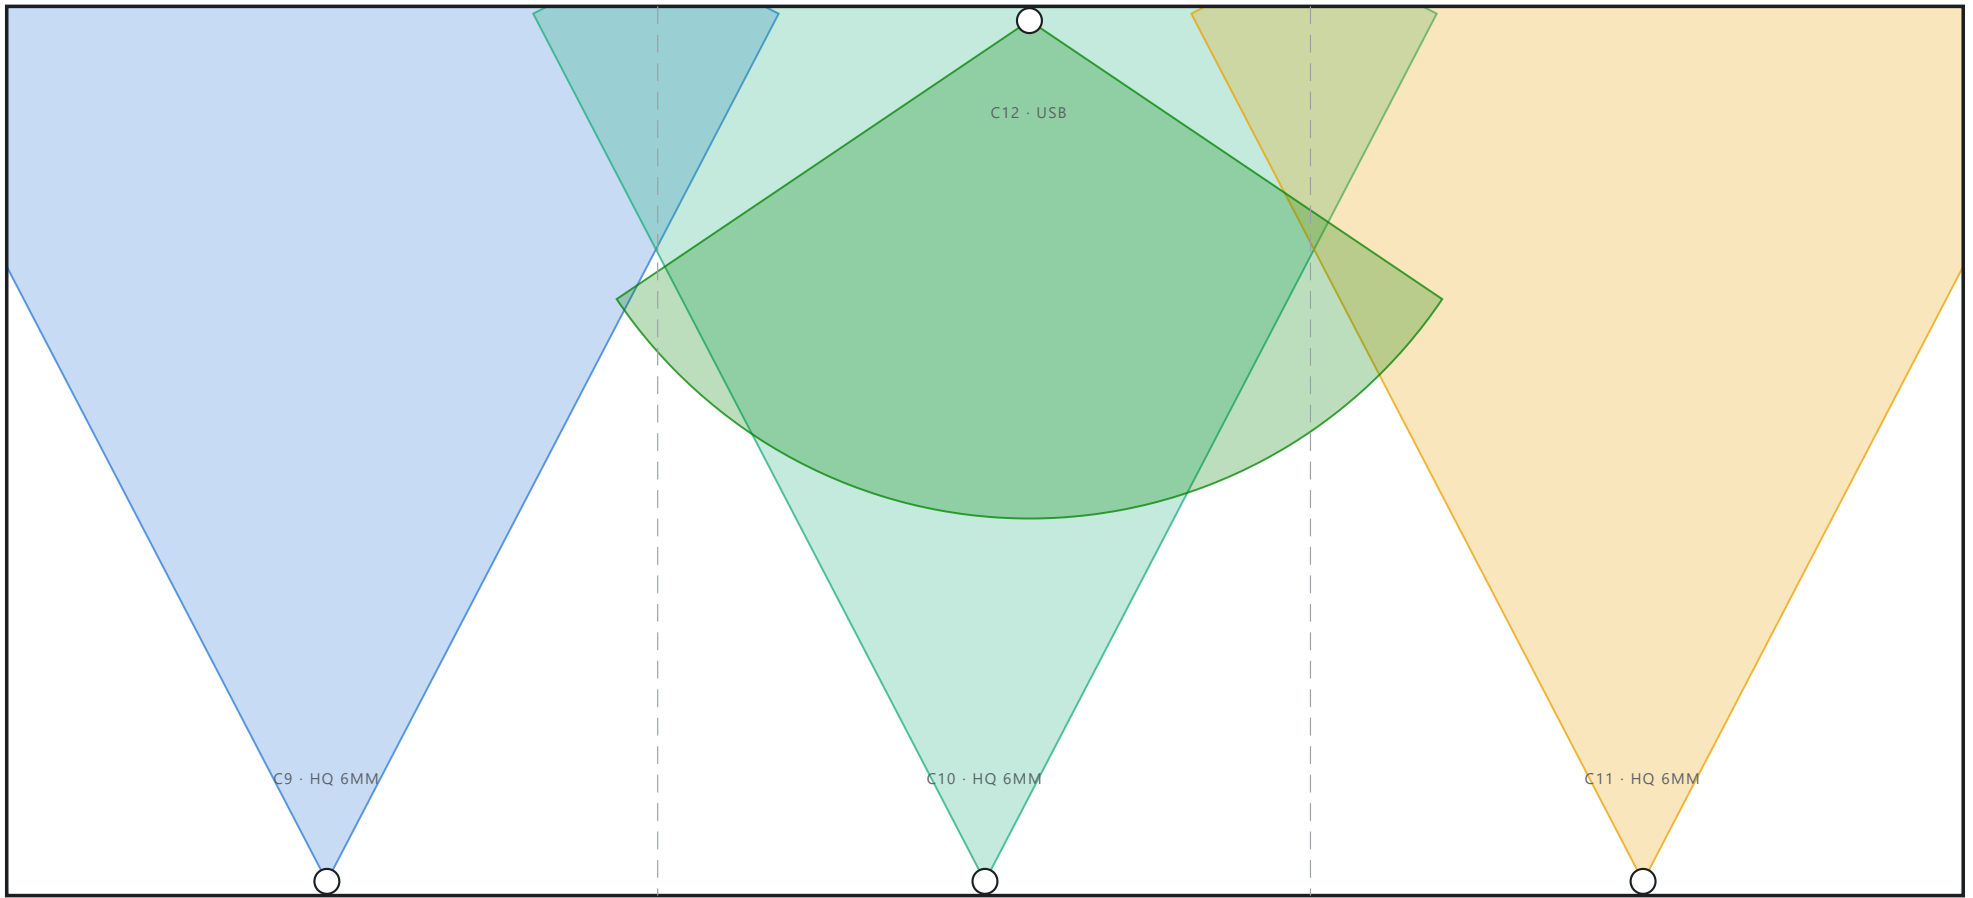

ENGINEERING · 4 CAMERAS · ISSUED PLAN

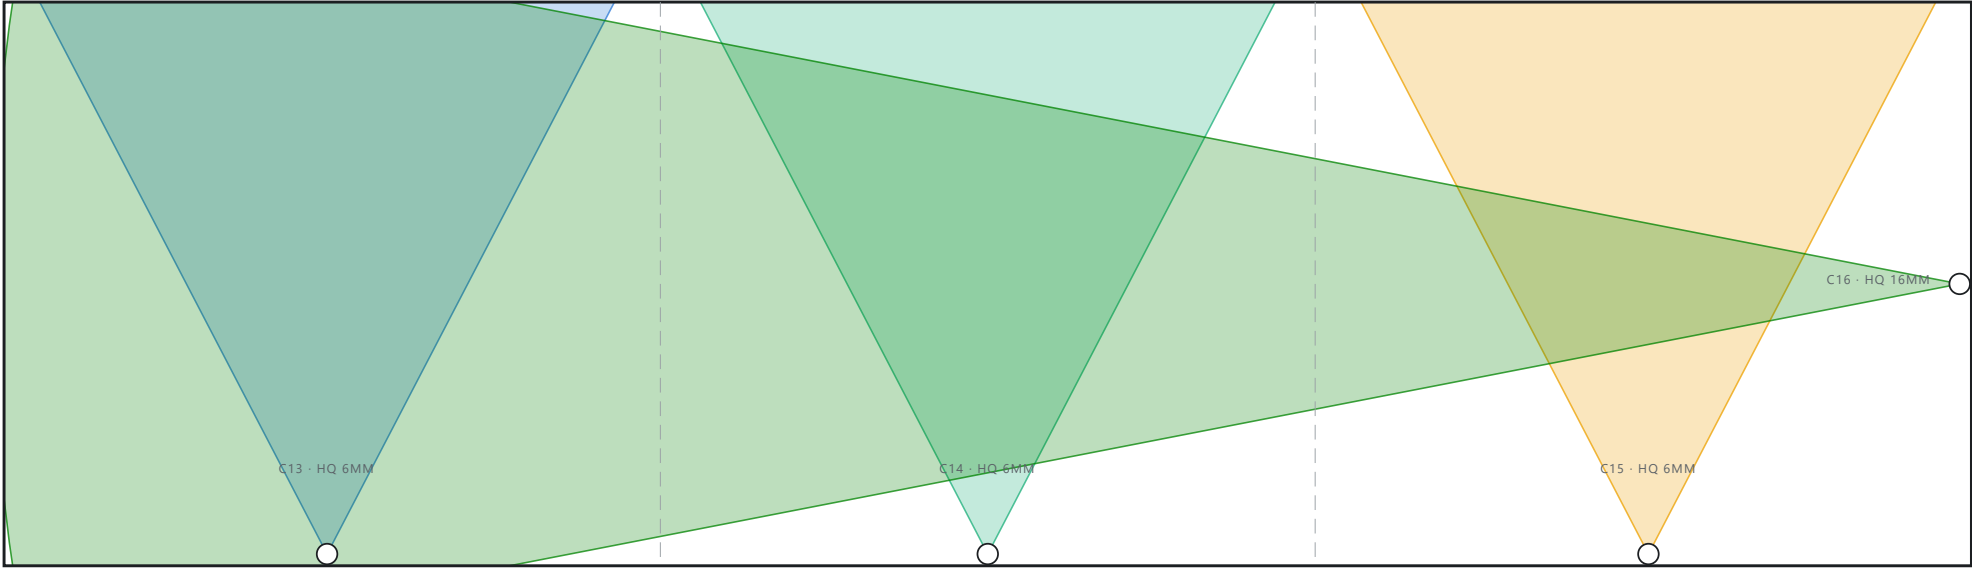

ROBOTICS · 4 CAMERAS · ISSUED PLAN

SHEET
A-15 CAMERA COVERAGE PLANS

PROJECT
DATA COLLECTION HUB

DATE
10 JUL 2026

DRAWN
NETHOLABS

STATUS
FOR DISCUSSION

CAMERA STUDY NOTES

1. Optics: Arducam USB (OV9782, 1280 × 800 colour global shutter, 120 fps MJPG, UVC, external trigger capable) with the 130° diagonal M12 lens: approx. 112° × 78° effective (wide angle distortion reduces the rectilinear figure), resolving ~4.3 px/cm at 1 m. Pi HQ (IMX477, 4056 × 3040): with 6 mm lens approx. 55° × 43°, 39 px/cm at 1 m; with 16 mm lens approx. 22° × 17°, 103 px/cm at 1 m.
2. Working ranges used for the wedges: USB 0.8–2.8 m (below ~1.5 px/cm beyond that), HQ 6 mm 2.5–6.5 m (≥ 6 px/cm), HQ 16 mm 6.5–14 m. The three ranges tile, so cells hand over cleanly.
3. Larger rooms are split into capture cells (dashed): one HQ 6 mm per ~5 × 4.5 m cell, USB units over close fast work (desks, rig tables, bench train). The 16 mm is only proposed in the robotics room, shooting the full 13.4 m length from the east end to avoid backlight from the west window.
4. Mounting: 230–270 above floor, tilted down 15–25°. Wedges are drawn in plan at mount height; floor coverage starts roughly 1 m out from the wall at these tilts. Aim for 15–20% overlap between neighbouring cells.
5. The USB units are colour global shutter at 120 fps: use them where motion is fastest and closest. The HQ units are rolling shutter: prefer them for wider, calmer context views.
6. Camera count this pass: 5 × USB (C1, C2, C5, C8, C12), 10 × HQ 6 mm (C3, C4, C6, C7, C9–C11, C13–C15), 1 × HQ 16 mm (C16). Positions are for taping out and testing, not final.